Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829
www.solaress.org

Which single-phase hybrid inverter is best?

10–16 kW single-phase hybrid inverters for Thai homes, compared on power, battery choice, protection, warranty and service

Solis · GoodWe · Deye · Sungrow · LuxPower · Growatt

1 The short answer

BEST OVERALL FOR HOMES

Solis S6-EH1P 12–16K

IP66 · < 4 ms · 2× surge

- Starts air cons and pumps easily
- Works with any approved 48 V battery
- Toughest casing, fastest backup
- 10-year warranty, good support

BEST FOR UP TO 12 KW

GoodWe ES 8–12K

IP66 · < 4 ms · 10 yrs

- 2× surge for 10 s for motors
- 48 V batteries, generator input
- Reliable brand, 10-year warranty

MOST ENERGY-MANAGEMENT FEATURES

Deye SUN-12–16K

100 A pass-through · 16 in parallel

- Very strong specs and energy management
- Generator input built in
- Claims can be slow in Thailand

2 Overall scorecard

Inverter	Power & surge	Battery choice	Protection & features	Warranty & service	Overall
Solis S6-EH1P 16K	★★★★★	★★★★½	★★★★★	★★★★½	4.8
GoodWe GW12K-ES-C10	★★★★☆	★★★★½	★★★★★	★★★★½	4.5
Deye SUN-16K-SG01LP1	★★★★★	★★★★★	★★★★☆	★★½☆☆	4.1
Sungrow SH10RS	★★★½☆	★★½☆☆	★★★★½	★★★★☆	3.6
LuxPower SNA12000	★★★★☆	★★★★☆	★★★☆☆	★★½☆☆	3.4
Growatt SPE 12000 ES	★★★★☆	★★★★☆	★★☆☆☆	★★★☆☆	3.2

Solar ESS assessment, 5 = best, for single-phase homes of 10–16 kW. Based on makers' datasheets and our field experience in Thailand. Sol-Ark and EG4 are left out: they are built for the US 120/240 V split-phase supply and are not offered in Thailand.

SOLARESS www.solaress.org

Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829
www.solaress.org


3 Power and surge

🔌 Rated single-phase output



Largest single-phase model in each range.

❄️ Short surge for starting air cons and pumps

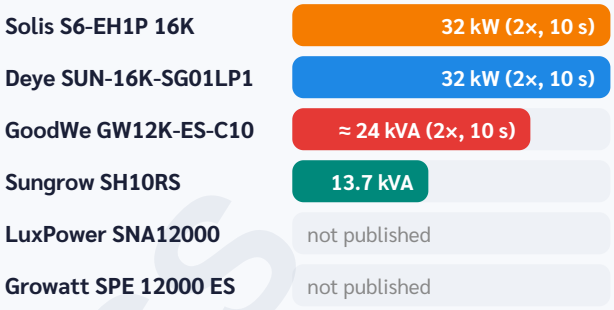

A high surge rating lets compressors start without tripping the inverter.

4 Technical specifications

Item	Solis S6-EH1P 16K	GoodWe GW12K-ES-C10	Deye SUN-16K-SG01LP1	Sungrow SH10RS	LuxPower SNA12000	Growatt SPE 12000 ES
Single-phase sizes	12/14/16 kW	8/10/12 kW	12/14/16 kW	8/10 kW	12 kW	12 kW
Battery type	48 V LV	48 V LV	48 V LV	HV (Sungrow)	48 V LV	48 V LV
Max solar panels	22.4 kWp	≈ 2× (10K: 20 kWp)	25.6 kWp	20 kWp	24 kWp	15 kWp
MPPT	3 × 40 A	2 × 32 A	3 × 32 A	4	2 × 35 A	2 × 27 A
Backup switch	< 4 ms	< 4 ms	UPS-class	< 10 ms	< 10 ms	n/p
Max efficiency	97.6%	97.6%	97.6%	97.5%	n/p	96.5%
Enclosure	IP66	IP65–66	IP65	IP65	n/p	IP20 (indoor)
Parallel units	10	6–16	16	—	3	9
Generator input	✔	✔	✔	—	✔ 15 kW	✔
Warranty	10 yrs	10 yrs	5 or 10 yrs	10 yrs (5+5)	n/c †	n/p

n/p = not published · n/c = not confirmed. † Warranty for LuxPower varies by dealer; one listing shows 2 years. GoodWe parallel count differs between listings (6–16). Solis 12–16K figures from the maker's preliminary datasheet. Confirm Thai availability and PEA certificate before ordering.

SOLAR ESS www.solaress.org

Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829
www.solaress.org

5 Warranty and after-sales service

Inverter	Service	What to expect in Thailand
Solis S6-EH1P 16K	★★★★½	Responsive back-office support through official distribution; strong off-grid and unbalanced-load support; practical remote app.
Deye SUN-16K-SG01LP1	★★½☆☆	Rich energy-management features, but claims are handled through regional distributors and can take a long time.
Sungrow SH10RS	★★★★☆	Large global brand with structured warranty; best with Sungrow's own high-voltage batteries.
GoodWe GW12K-ES-C10	★★★★½	Established brand with a 10-year standard warranty, structured claims and a good monitoring app.
LuxPower SNA12000	★★½☆☆	Widely used for off-grid; service via local dealers, warranty terms vary by dealer.
Growatt SPE 12000 ES	★★★☆☆	Off-grid unit for indoor installation; service via local dealers.

6 Three golden rules before buying

🔋 Match the battery voltage
Low-voltage (48 V) inverters need 48 V batteries; high-voltage inverters need high-voltage batteries. Never mix them.

🔗 Closed-loop communication
Check the battery is on the inverter maker's approved list and talks to it over CAN or RS485.

❄️ Check surge, not just kW
Air cons and deep-well pumps need high starting power. Check the surge rating and pass-through current.

7 Our recommendation

Most single-phase homes, 12–16 kW → Solis S6-EH1P 12–16K with 48 V LiFePO4 batteries.

Advanced energy management, large parallel systems → Deye SUN-12–16K, with a plan for slower warranty claims.

Homes up to 12 kW → GoodWe ES 8–12K. Premium 10 kW with high-voltage battery and AFCI: Sungrow SH10RS.

Simple off-grid, indoor install → LuxPower SNA12000 or **Growatt SPE 12000 ES**, installed indoors, with a clear written warranty from the dealer.

Thai rules: home rooftop systems up to 10 kWp qualify for the PEA-connected tax deduction. Very large single-phase loads may need a bigger meter or a 3-phase supply. Check with PEA before you buy.

Sources: solisinverters.com (S6-EH1P 12–16K-L), deyeinverter.com (SUN-12/14/16K-SG01LP1, 2026), GoodWe ES-C10 (GW10K/GW12K), Sungrow SH10.0RS / SH8.0RS, LuxPower SNA12000, Growatt SPE 12000 ES, PEA (pea.co.th). October 2026. Confirm against the current datasheet before ordering.

SOLAR ESS www.solaress.org