

Chapter 2	Configuration Space
Chapter 3	Rigid-Body Motions
Chapter 4	Forward Kinematics
Chapter 5	Velocity Kinematics and Statics
Chapter 6	Inverse Kinematics
Chapter 7	Kinematics of Closed Chains
Chapter 8	Dynamics of Open Chains
Chapter 9	Trajectory Generation
Chapter 10	Motion Planning
Chapter 11	Robot Control
Chapter 12	Grasping and Manipulation
Chapter 13	Wheeled Mobile Robots


Important concepts, symbols, and equations

Forward kinematics of a serial chain:

Given

- $M = T_{sb}(0) \in SE(3)$, the configuration of the end-effector frame $\{b\}$ at the home configuration $\theta = 0$,
- the screw axes for each joint at $\theta = 0$,
and
- the joint vector θ ,

find $T_{sb}(\theta) \in SE(3)$.

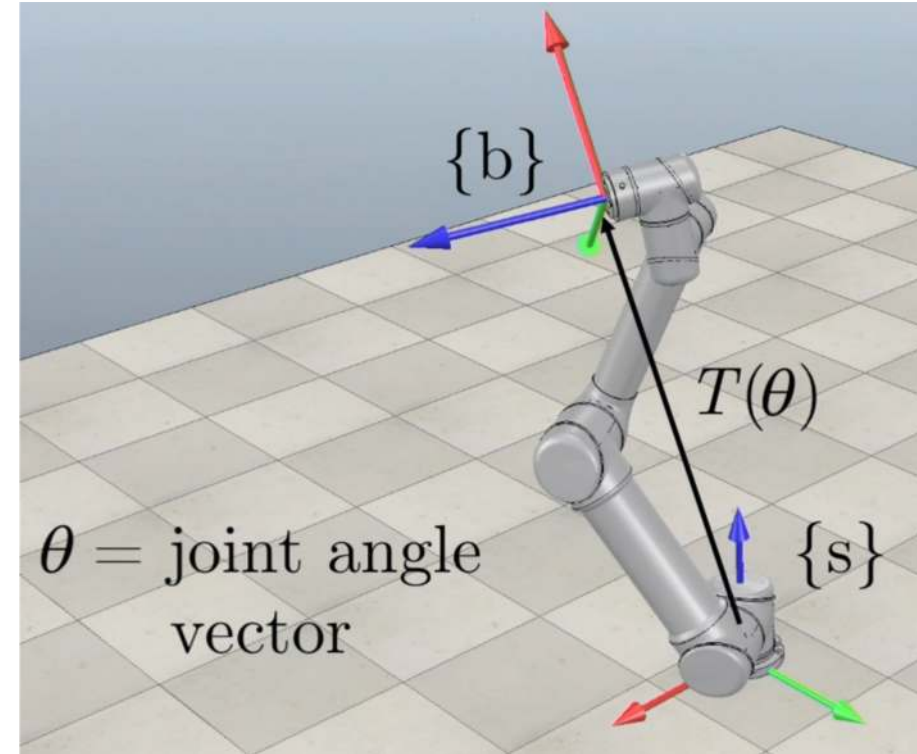

Important concepts, symbols, and equations (cont.)

- For screw axes S expressed in $\{s\}$, the **product of exponentials** (PoE) in the space frame is


$$T(\theta) = e^{[S_1]\theta_1} \dots e^{[S_n]\theta_n} M$$

- For screw axes $\mathcal{B}$ expressed in $\{b\}$, the PoE is

$$T(\theta) = M e^{[\mathcal{B}_1]\theta_1} \dots e^{[\mathcal{B}_n]\theta_n}$$

Important concepts, symbols, and equations (cont.)

The **Universal Robot Description Format (URDF)** is an XML file describing the kinematics, inertial properties, and geometry of a tree-structured robot.

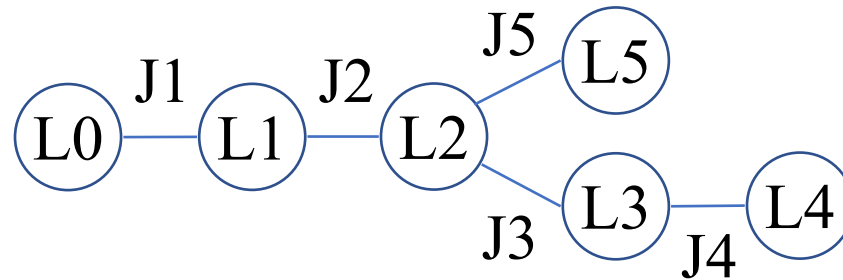


the **joint** element (kinematics)


```
<joint name="joint2" type="revolute">
  <parent link="link1"/>
  <child link="link2"/>
  <origin rpy="0 1.5708 0" xyz="0 0.5 0">
  <axis xyz="0 1 0">
  <limit lower="-3.0" upper="3.0">
</joint>
```

the **link** element (inertial properties)


```
<link name="link2">
  <inertial>
    <origin rpy="0 0 0" xyz="0 0 0.5">
    <mass value="2.25">
    <inertia ixx="1.0" ixy="0" ixz="0"
              iyy="2.0" iyz="0" izz="3.0"/>
  </inertial>
</link>
```

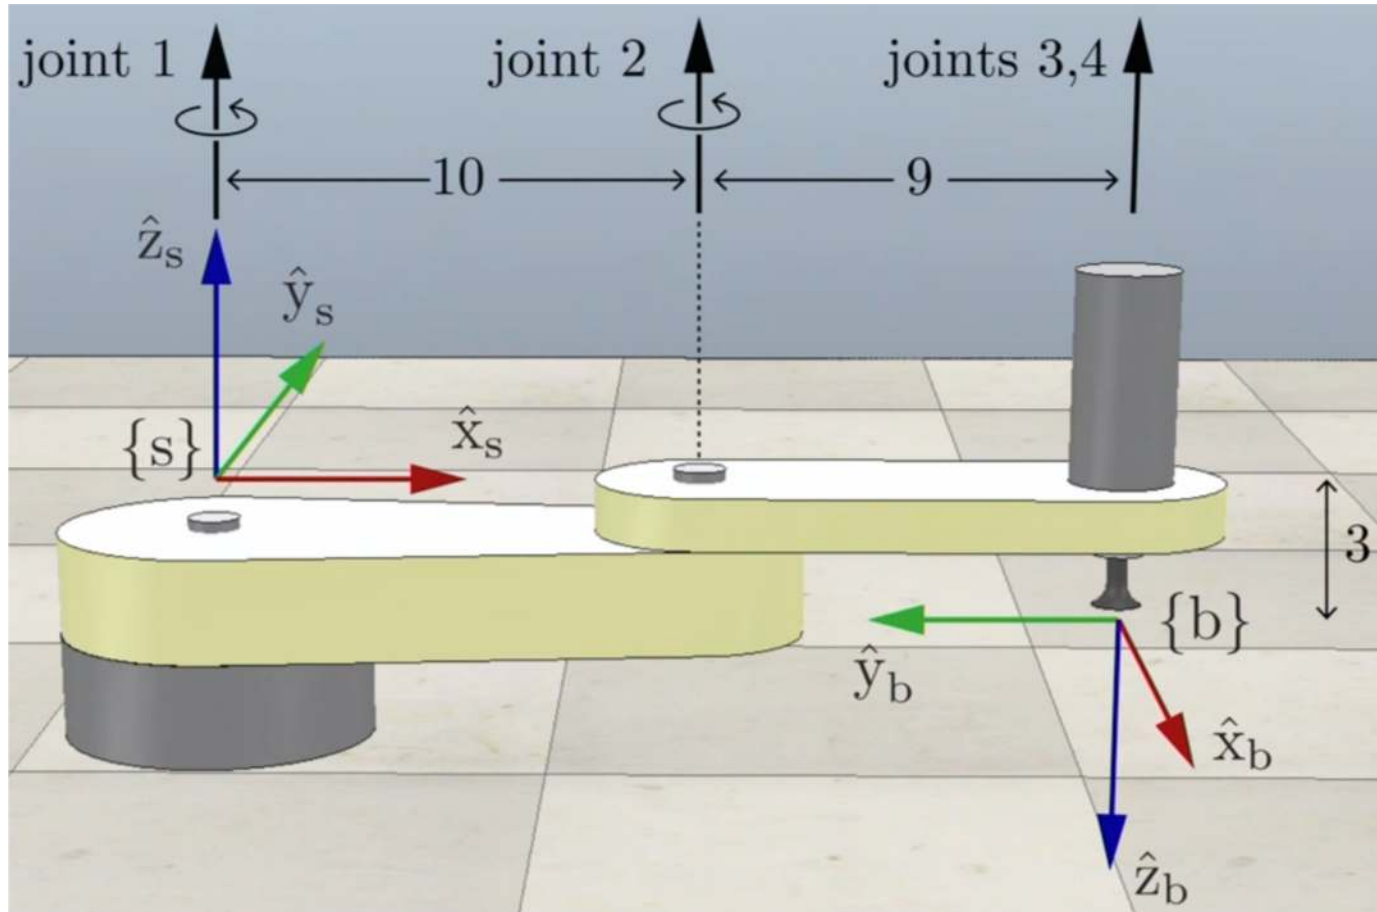

RRRP robot

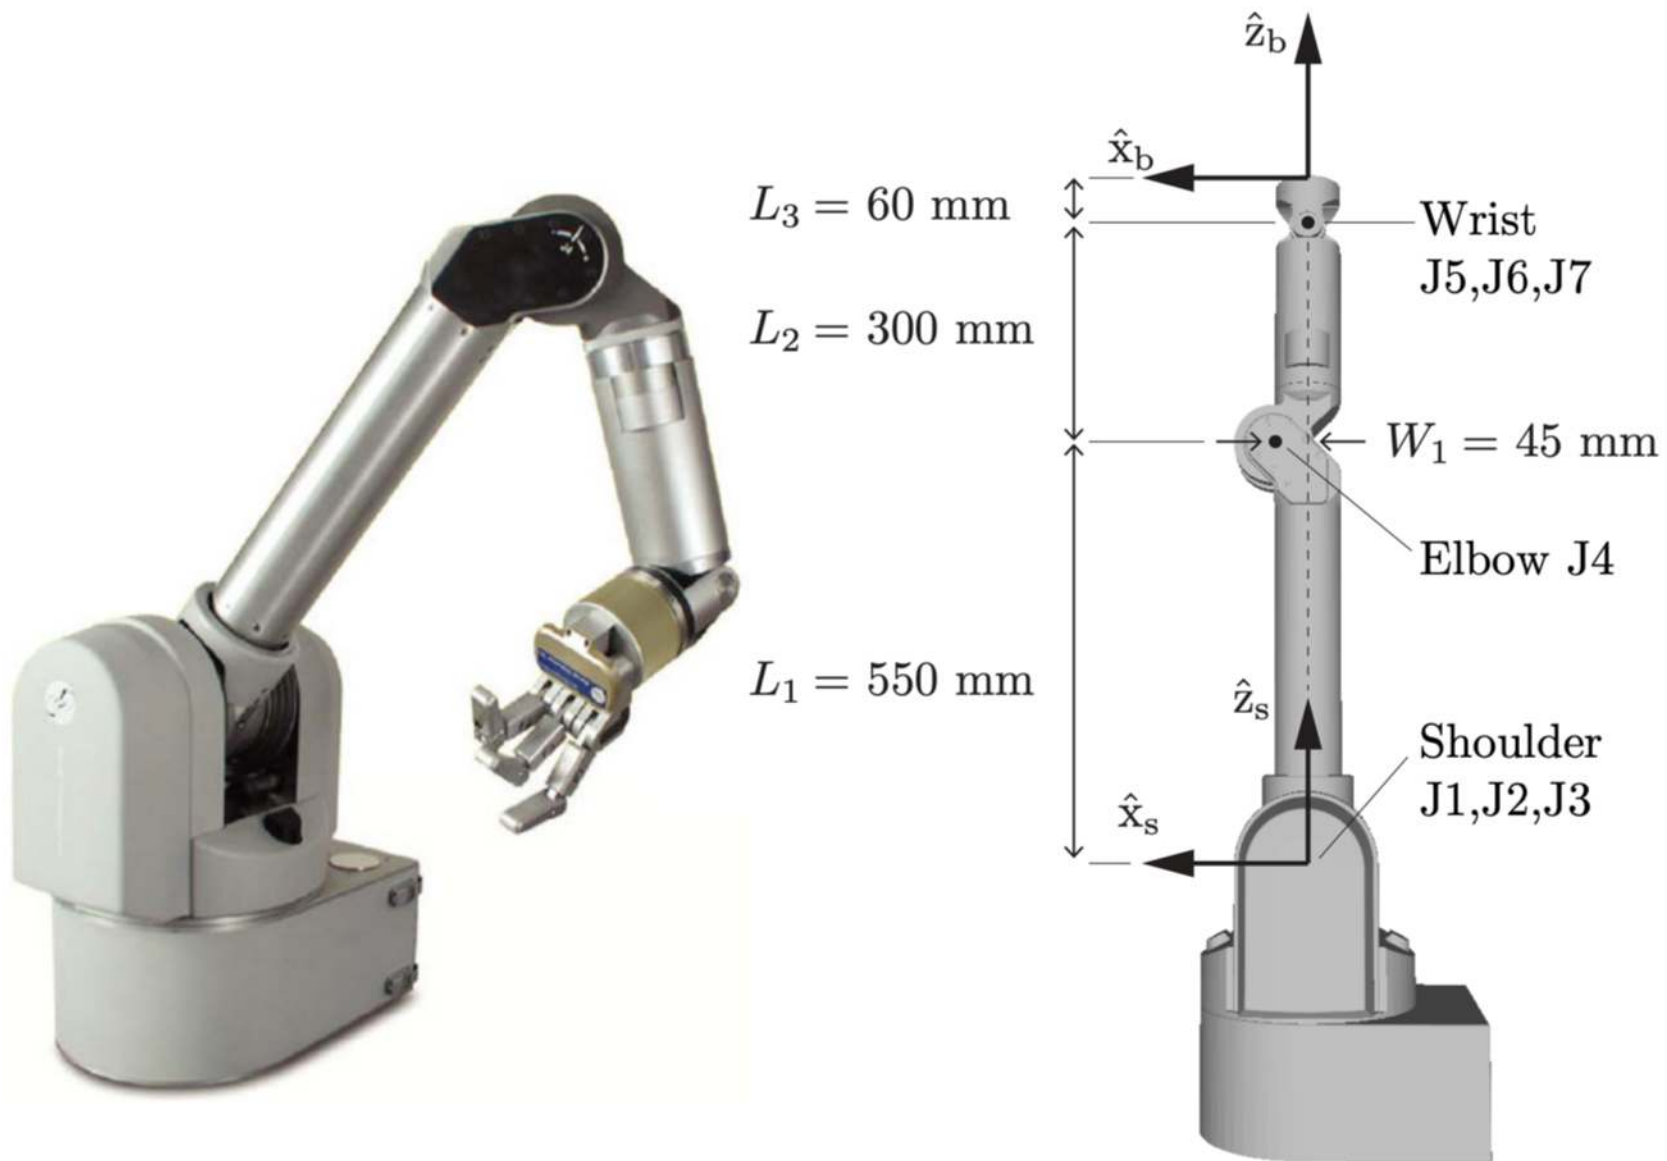

Barrett Technology's WAM 7R robot

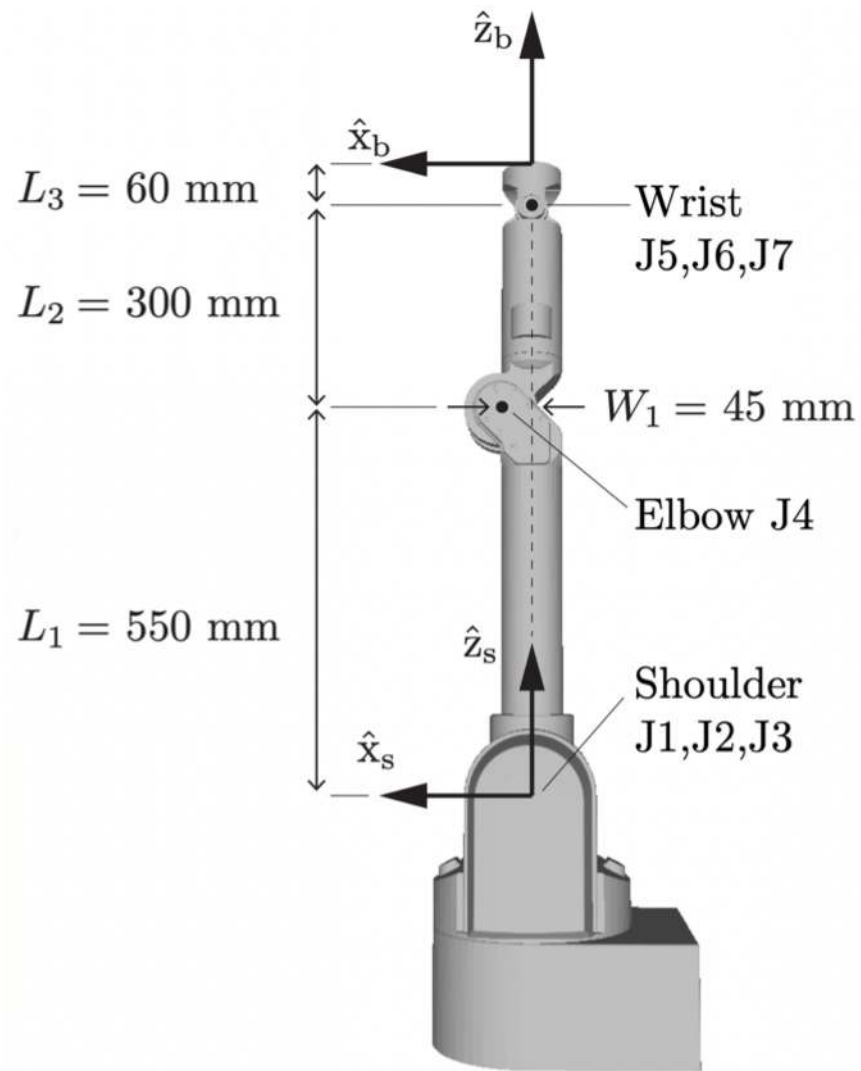


$$M = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & L_1 + L_2 + L_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

screw axes $\mathcal{B}_i$

i	ω_i	v_i
1	(0, 0, 1)	(0, 0, 0)
2	(0, 1, 0)	$(L_1 + L_2 + L_3, 0, 0)$
3	(0, 0, 1)	(0, 0, 0)
4	(0, 1, 0)	$(L_2 + L_3, 0, W_1)$
5	(0, 0, 1)	(0, 0, 0)
6	(0, 1, 0)	$(L_3, 0, 0)$
7	(0, 0, 1)	(0, 0, 0)

Joint axes 1, 3, 5, and 7 are aligned with $\hat{z}_s$.
Joint axes 2, 4, and 6 are out of the page.

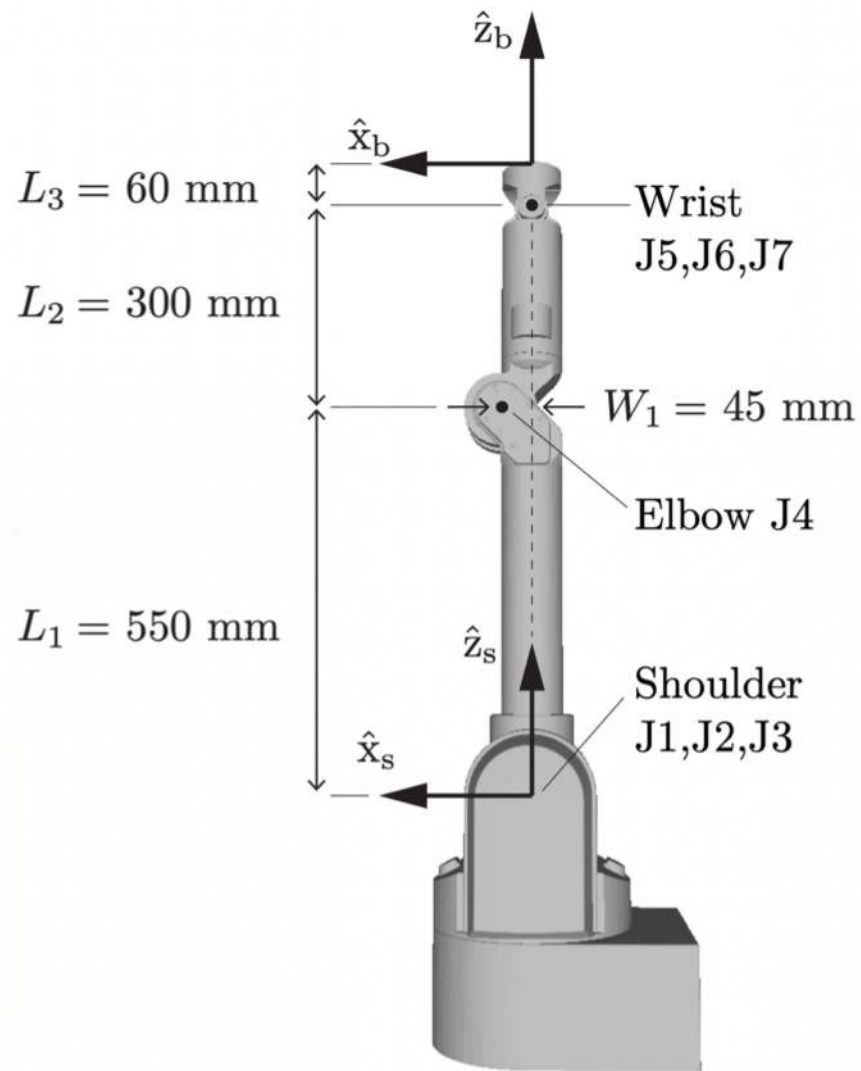

screw axes S_i

Joint axes 1, 3, 5, and 7 are aligned with $\hat{z}_s$.
 Joint axes 2, 4, and 6 are out of the page.