

Contents


ParcelGuru API Documentation	2
API Key Management.....	2
Authentication.....	3
Environment.....	3
1. Order Push API.....	3
2. Track Order API.....	6
3. Store Locations API	6
Notes for Developers	6
Example Responses.....	7
1. Order Push API	7
2. Track Order API	8
3. Store Locations API.....	9
4. Webhook setup	10
Authentication & Headers	10
Event Update (Webhook).....	10
Shipment Status Enums	10
Payload	10

ParcelGuru API Documentation

Welcome to the **ParcelGuru API Suite**. These APIs empower businesses to integrate seamlessly with ParcelGuru's logistics platform, enabling order creation, tracking, and store management.

API Key Management

ParcelGuru user can generate API key using their merchant login; to generate API key use **Plugin** menu option; select **Configure** on **Custom Plugin** to generate API key; follow the screen shots below:

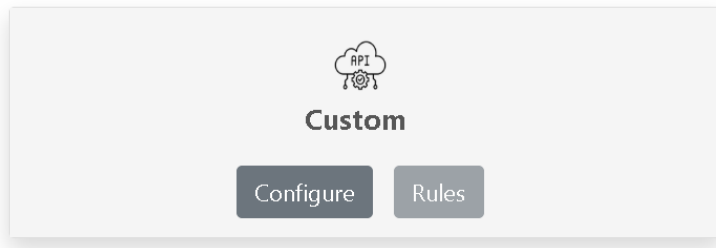

← Configure Custom Plugin



Instructions to setup and use this plugin:

- Once you generate a new Token, your **old token** will **stop working** immediately.
 - To protect your data, you'll only be able to reveal your API token **once immediately after generation**.
 - **Copy and save** your API token in a secure place.
 - Your token is valid for **120 days**; generate a new token if your token is expired.
-

Authentication

All requests require the following headers:

- **x-parcelguru-key** – Your API key (string, required)
- **x-parcelguru-api-version** – API version (default: **v1**)
- **x-parcelguru-topic** – Event topic (required; used in order push events; refer table below)

myparcelguru.v1.order_created	When a new order is placed
*myparcelguru.v1.order_processed	When payment is successfully processed
myparcelguru.v1.order_fulfilled	When an order is shipped/delivered
myparcelguru.v1.order_updated	When an order details is updated
myparcelguru.v1.order_cancelled	When a order cart is cancelled

*Use this topic to push successfully processed/paid orders to ParcelGuru to Manifest for shipping.

Environment

API Endpoint for development and production:

Demo Environment	https://demo.myparcelguru.com
Production Environment	https://www.myparcelguru.com

Note: Ensure you complete your integration and testing with demo (staging) environment; prior moving to production. Create a dummy account on demo environment to complete your testing, connect with tech team for any assistance.

1. Order Push API

Endpoint:

POST /api/v1/channel/orders/create

Description:

Push an order into ParcelGuru's manifest against your chosen carrier.

Headers:

- **x-parcelguru-topic:** myparcelguru.v1.order_processed
- **x-parcelguru-key:** <your-api-key>
- **x-parcelguru-api-version:** v1

Request Body (JSON):

```
{
  "order_id": "#1015",
  "order_date": "2026-03-26T17:45:00-05:00",
  "order_status": "paid",
  "pickup_location": "Viman Nagar Store",
  "invoice_number": "INV10110",
  "invoice_date": "26-03-2026",
  "package_type": "prepaid",
  "package_declared_value": "149.99",
  "package_collectable_amount": "0",
  "package_weight": "1.5",
  "package_length": "20",
  "package_breadth": "30",
  "package_height": "40",
  "package_is_fragile": false,
  "line_items": [
    {
      "id": 987654321,
      "sku": "WH-001",
      "title": "Wireless Headphones",
      "quantity": 1,
      "price": "99.99",
      "weight": "150"
    },
    {
      "id": 987654322,
      "sku": "WH-001",
      "title": "Protective Case",
      "quantity": 1,
      "price": "50.00",
      "weight": "200"
    }
  ],
  "shipping_address": {
    "first_name": "Rakesh",
    "last_name": "Patel",
    "address1": "123 Main Street",
    "address2": "Near M G Society",
    "city": "Delhi",
    "state": "Delhi",
    "country": "India",
    "pincode": "110001",
    "latitude": "",
    "longitude": ""
  },
  "customer": {
    "company": "ABC Pvt. Ltd.",
    "first_name": "Rakesh",
    "last_name": "Patel",
    "phone": "+919012345678",
    "alternate_phone": "+919011234567",
    "email": "customer@example.com"
  }
}
```

Refer this table for details on payload attribute:

order_id	Mandatory; expected unique value for the order of your system
pickup_location	Optional; if blank the shipment will take default pickup location; else provide registered pickup location name
invoice_number	Optional; good to have
invoice_date	Optional; good to have; data format dd-mm-yyyy
package_type	Mandatory; possible values: prepaid or cod
package_declared_value	Mandatory; declared value in INR
package_collectable_amount	Optional; if package type is prepaid Mandatory; if package type is cod
package_weight	Mandatory; value must be in kgs
package_length	Mandatory; value must be an integer measured in cm
package_breadth	Mandatory; value must be an integer measured in cm
package_height	Mandatory; value must be an integer measured in cm
package_is_fragile	Optional; if ignored it will be set to false
line_items	Mandatory; at-least one line item is required
shipping_address	Mandatory; cannot manifest order if shipping address is not supplied or valid
customer	Mandatory; ensure contact details are correct to avoid NDR

2. Track Order API

Endpoint:

GET /api/v1/channel/orders/track/{awb_number}

Description:

Retrieve tracking details for an order using its AWB number.

Headers:

- **x-parcelguru-key:** <your-api-key>

Example Request:

GET /api/v1/channel/orders/track/6098670987

Response:

Returns current shipment status, timestamps, and carrier updates.

3. Store Locations API

Endpoint:

GET /api/v1/channel/store/locations

Description:

Fetch a list of active store locations linked to your ParcelGuru account.

Headers:

- **x-parcelguru-key:** <your-api-key>

Response:

Returns an array of store locations with details such as city, state, and operational status.

Notes for Developers

- All endpoints are currently configured for development. Replace with production base URL when deploying.
- Ensure proper error handling for authentication failures and invalid payloads.
- Use HTTPS in all environments.

Status Codes

- 200 - OK: Everything went as planned.
- 400 - Bad Request: You did something wrong. Often a missing argument or parameter.
- 401 - Unauthorized: Authentication was incorrect.
- 404 - Not Found
- 500 - Internal Server Error: We had a problem processing the request.
- 503 - Service Unavailable: Try again later.

Example Responses

1. Order Push API

Endpoint: POST /api/v1/channel/orders/create

Example Response:

```
{  
  
  "status": "success"  
  
}
```

status	Possible value: success error
--------	-------------------------------------

2. Track Order API

Endpoint: GET /api/v1/channel/orders/track/{awb_number}

Example Response:

```
{
  "status": "success",
  "data": {
    "id": "46763-03500-6174-4",
    "trackingNo": "579741485710",
    "status": "In transit",
    "remark": "",
    "pickupDate": "2026-01-08T01:30:00.000Z",
    "actualPickupDate": "2026-01-09T01:30:00.000Z",
    "estDeliveryDate": "2026-01-14T01:30:00.000Z",
    "history": [
      {
        "remarks": "",
        "code": "FMPM",
        "_id": "695e9d3d20d48e711638c1fb",
        "timestamp": "2026-01-07T17:51:00.000Z",
        "status": "FMPrepaidMenifested",
        "description": "Ready to Ship",
        "location": "Viman Nagar Store"
      },
      {
        "remarks": "",
        "code": "PPB",
        "_id": "695e9d1620d48e711638c04d",
        "timestamp": "2026-01-07T17:51:00.000Z",
        "status": "PrePaidBooked",
        "description": "Order Booked",
        "location": "Viman Nagar Store"
      },
      {
        "remarks": "",
        "code": "DM",
        "_id": "695e9cc820d48e711638bfbd",
        "timestamp": "2026-01-07T17:50:00.000Z",
        "status": "Draft",
        "description": "In Draft Mode",
        "location": "Viman Nagar Store"
      }
    ]
  }
}
```

status	Possible value: success error
--------	-------------------------------------

3. Store Locations API

Endpoint: GET /api/v1/channel/store/locations

Example Response:

```
{
  "status": "success",
  "data": [
    {
      "registeredName": "Viman Nagar Store",
      "status": "Active",
      "name": "Rupesh",
      "email": "viman_nagar_store@gmail.com",
      "type": "both",
      "default": true,
      "phone": "9011111111",
      "address": {
        "addressLine1": "Row House No. 4, Lunked Garden, Satyam Marg, Viman Nagar, Viman Nagar",
        "addressLine2": "",
        "city": "Pune",
        "state": "Maharashtra",
        "country": "India",
        "pinCode": "411033"
      },
      "returns": {
        "addressLine1": "Row House No. 4, Lunked Garden, Satyam Marg, Viman Nagar, Viman Nagar",
        "addressLine2": "",
        "city": "Pune",
        "state": "Maharashtra",
        "country": "India",
        "pinCode": "411033"
      }
    },
    {
      "registeredName": "Bengaluru Store",
      "status": "Active",
      "name": "Sachin",
      "email": "bengaluru_store@gmail.com",
      "type": "both",
      "default": false,
      "phone": "9022222222",
      "address": {
        "addressLine1": "24 3 Hdfc House No 51 Kasturba Road Bangalore Karnataka 560001",
        "addressLine2": "",
        "city": "Bengaluru Urban",
        "state": "Karnataka",
        "country": "India",
        "pinCode": "560001"
      },
      "returns": {
        "addressLine1": "24 3 Hdfc House No 51 Kasturba Road Bangalore Karnataka 560001",
        "addressLine2": "",
        "city": "Bengaluru Urban",
        "state": "Karnataka",
        "country": "India",
        "pinCode": "560001"
      }
    }
  ]
}
```

status	Possible value: success error
--------	-------------------------------------



4. Webhook setup

Authentication & Headers

Custom HTTP headers for security and routing:

Header	Required	Description
x-access-token	Yes	Used by ParcelGuru to authenticate against your listener.

Event Update (Webhook)

This is a POST request sent **from** ParcelGuru **to** your server to provide real-time status updates.

- **Method:** POST
- **Endpoint:** `{{YOUR_CONFIGURED_URL}}/api/v1/channel/event/hook`

Note: Above endpoint is just an example, you can share endpoint as per your API design

Shipment Status Enums

The following values are returned in the **status** field of the Event Update webhook:

Status	Description
pre_booked	Shipment created in the system.
ready_to_ship	Label printed, awaiting pickup.
pending_pickup	Pending for pickup
picked_up	Carrier has collected the parcel.
in_transit	Parcel is moving through hubs.
out_for_delivery	Parcel is with the last-mile delivery agent.
delivered	Successfully delivered to the customer.
cancelled	Order has been voided.
exception	Delivery issues (e.g., Address incorrect, misroute, damage etc...).
returned	Shipment is returned to origin
lost	Shipment is declared lost.

Payload

```
{
  "event": {
    "status": "ready_to_ship",
    "datetime": "2019-01-09T17:10:42.767",
    "message": "Ready to Ship"
  },
  "order_id": "4759-601949-8207",
  "awb_number": "4992610067874"
}
```

Note: payload schema should not change, you can share access token and API endpoint.