C242 (PK)

14401

Fog lamp switch



F08177

Pin	Circuit	Circuit function
1	1347 (DB/WH)	Fog lamp switch, output
2	13 (RD/BK)	High beam lamp, output
3	–	not used
4	57 (BK)	Ground
5	–	not used
6	478 (TN/OG)	Fog lamp relay, to, Fog lamp switch
7	–	not used
8	19 (LB/RD)	Instrument illumination, feed

C250 (BK/RD)

14401

Ignition switch
(11572)

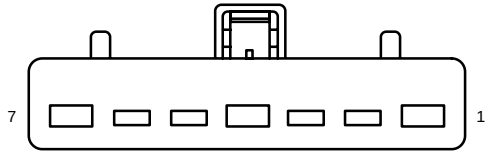

F07073

Pin	Circuit	Circuit function
1	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
2	–	not used
3	1420 (YE/LB)	Key removal inhibit solenoid, Switched, Ground, – automatic transmission
4	32 (RD/LB)	Voltage supplied at all times (overload protected)
5	158 (BK/PK)	Key warning switch (11A127), output
	158 (BK/PK)	Key warning switch (11A127), output
6	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
7	306 (TN/LB)	Voltage supplied in Start (overload protected)

C248 (WH)

14405



F04239

7M196



F04241

(1) 199 (LB/YE)
(2) 89 (OG)
(3) 1093 (TN/RD)
(4) 306 (TN/LB)