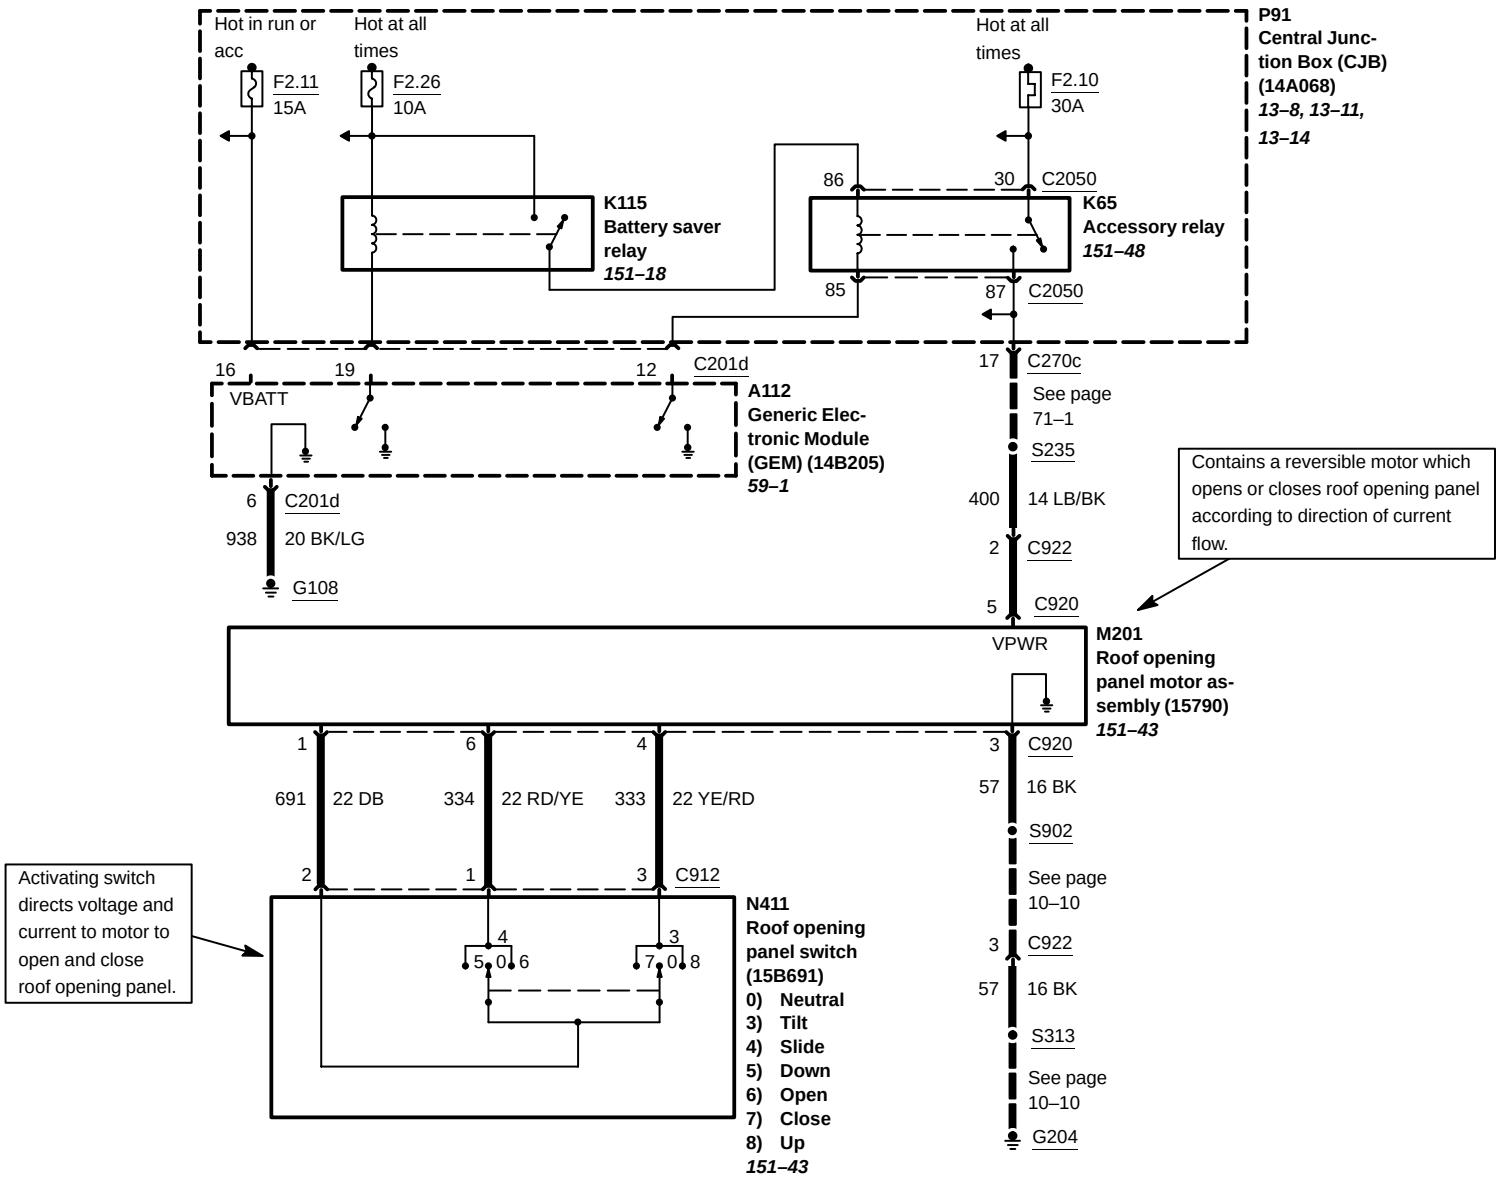
Hot in run or acc
F2.11
15A
Hot at all times
F2.26
10A
Hot at all times
F2.10
30A
P91
Central Junction Box (CJB)
(14A068)
13–8, 13–11, 13–14
86
30
C2050
K115
Battery saver relay
151–18
K65
Accessory relay
151–48
85
87
C2050
16
VBATT
19
12
C201d
A112
Generic Electronic Module (GEM) (14B205)
59–1
17
C270c
See page 71–1
S235
400
14 LB/BK
6
C201d
938
20 BK/LG
G108
2
C922
5
C920
Contains a reversible motor which opens or closes roof opening panel according to direction of current flow.
VPWR
M201
Roof opening panel motor assembly (15790)
151–43
1
691
22 DB
6
334
22 RD/YE
4
333
22 YE/RD
3
C920
57
16 BK
S902
See page 10–10
2
1
3
C912
Activating switch directs voltage and current to motor to open and close roof opening panel.
4
5 0 6
3
7 0 8
N411
Roof opening panel switch (15B691)
0) Neutral
3) Tilt
4) Slide
5) Down
6) Open
7) Close
8) Up
151–43
3
C922
57
16 BK
S313
See page 10–10
G204