C251

14401

D20
Data Link Connector
(DLC) (14489)

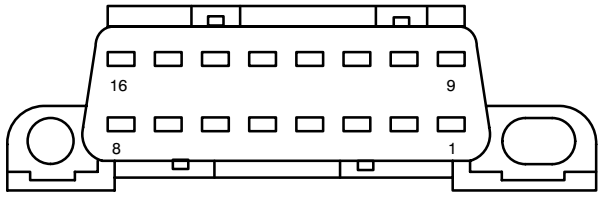

F16055

Pin	Circuit	Circuit Function
1	–	not used
2	4-EG7 (GY/RD)	Data link, bus positive
3	–	not used
4	31-ED6 (BK)	Ground
5	91-ED6 (BK/YE)	Ground
6	–	not used
7	4-EE10 (GY/BK)	Data link, bus positive
8	–	not used
9	–	not used
10	5-EG7 (BU/RD)	Data link, bus negative
11	–	not used
12	–	not used
13	7-RE14 (YE/GN)	Voltage D.C. supplied at all times (sensor)
14	–	not used
15	–	not used
16	29-ED6 (OG/YE)	Voltage supplied at all times (overload protected)

C252

14401

A102
Passive anti–theft
transceiver module
(15607)

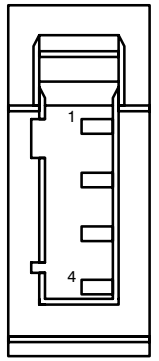

F04116

Pin	Circuit	Circuit Function
1	29S-GL36 (OG/BU)	Voltage supplied at all times (overload protected), Switched
2	31-GL36 (BK)	Ground
3	8-GL36 (WH/RD)	Sensor signal
4	10-GL36 (GY/RD)	Signal 2 (Y–direction, reverse, downward)

C254

14401

E28
Glove box lamp
(14413)



F02071

Pin	Circuit	Circuit Function
1	31-LB8 (BK)	Ground
2	29S-LB8 (OG)	Voltage supplied at all times (overload protected), Switched