C202c

14401

N442
Multifunction switch

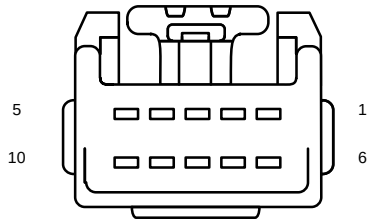

F10091

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	13 (RD/BK)	Power, Hot with Low Beams on
7	15 (RD/YE)	Power, Hot with Headlamps on
	13 (RD/BK)	Power, Hot with Headlamps on
8	196 (DB/OG)	Voltage supplied at all times (overload protected)
9	697 (BN)	High beam relay to Multifunction switch
10	–	not used

C205a

14401

N113
Main light switch
(11654)

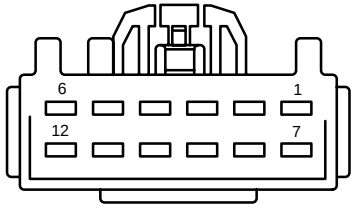

F12107

Pin	Circuit	Circuit function
1	–	not used
2	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
3	–	not used
4	–	not used
5	477 (LB/BK)	Fog lamp switch, to front fog lamp, Relay
6	1205 (BK)	Ground
7	1045 (DB/WH)	Illumination dimmer, output
	1399 (DB/WH)	Main light switch (11654), to Central security module
8	196 (DB/OG)	Voltage supplied at all times (overload protected)
9	15 (RD/YE)	Power, Hot with Headlamps on
	13 (RD/BK)	Power, Hot with Headlamps on
10	195 (TN/WH)	Voltage supplied at all times (overload protected)
11	3043 (WH/PK)	Main light switch (11654), to Generic Electronic Module (GEM) (14B205)
	–	not used
12	14 (BN)	Power, Exterior lamps