C349 (WH)

14N104

A200
Lighting control module

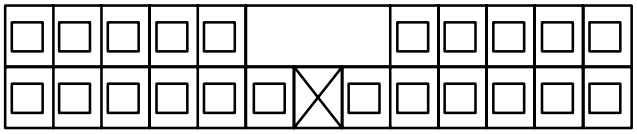

F22019

Pin	Circuit	Circuit Function
1	LX07 (BK/WH)	Autolamp sensor
2	LA14 (YE)	Headlamps, Switched, Ground
3	LA18 (OG/BU)	High beam lamp, left front
4	LA11 (RD/BU)	Voltage supplied at all times (overload protected)
5	LA15 (RD/WH)	Low beam lamp, right front
6	LA12 (RD/YE)	Voltage supplied at all times (overload protected)
7	LA17 (OG/WH)	High beam lamp, right front
8	LA16 (OG)	Low beam lamp, left front
9	PR05 (LG)	Voltage supplied in Start and Run (overload protected)
10	PR12 (GN/BK)	Brake indicator, switch sense

Pin	Circuit	Circuit Function
11	PRE1 (BK)	Ground
12	LX03 (GN)	Autolamp sensor
13	LA21 (BN)	Headlamp flasher, switch sense
14	SC23 (PK/WH)	Smart Entry Control (SEC)/Timer module, to Lighting control module
15	LA23 (LG/RD)	High beam lamp, switch sense
16	PR11 (BU/YE)	Bulb check relay, control
17	–	not used
18	–	not used
19	LX04 (BU/WH)	Autolamp time delay signal
20	LA03 (OG/BU)	High beam lamp, left front
21	LC45 (GY/RD)	Tail lamp relay, control
22	PR01 (BU/BK)	Voltage supplied in Start (overload protected)

C350 (WH)

14N104

A200
Lighting control module



F10069

Pin	Circuit	Circuit Function
1	LA12 (RD/YE)	Voltage supplied at all times (overload protected)
2	SC23 (PK/WH)	Smart Entry Control (SEC)/Timer module, to Lighting control module
3	LA14 (YE)	Headlamps, Switched, Ground
4	LA21 (BN)	Headlamp flasher, switch sense
5	LA16 (OG)	Low beam lamp, left front
6	LA18 (OG/BU)	High beam lamp, left front
7	LA11 (RD/BU)	Voltage supplied at all times (overload protected)
8	LA15 (RD/WH)	Low beam lamp, right front
9	LA23 (LG/RD)	High beam lamp, switch sense
10	LA17 (OG/WH)	High beam lamp, right front

C351 (BN)

14A333

Y19
Speaker, right rear



F02129

Pin	Circuit	Circuit Function
1	RB16 (BU)	Speaker, right rear
2	RB22 (BU/BK)	Speaker, right rear

C352

14N104

Y17
Speaker, left rear



F02263

Pin	Circuit	Circuit Function
1	RA54 (BU/WH)	Speaker, left rear
	RB11 (GN)	Speaker, left rear
2	RA55 (BU/YE)	Speaker, left rear
	RB12 (BU/YE)	Speaker, left rear