C223

14401

P61
Joint connector 4

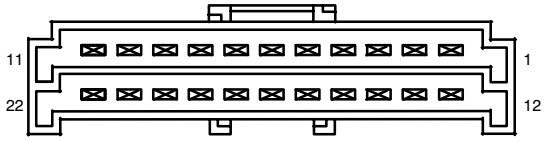

F22015

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	5-GL58 (BU/BK)	Data link, bus negative
7	5-EG10 (BU/YE)	Data link, bus negative
8	5-FA10 (BU/YE)	Data link, bus negative
9	5-EG7 (BU/RD)	Data link, bus negative
10	5-EG8 (BU/WH)	Data link, bus negative
11	5-EG1 (BU)	Data link, bus negative
12	4-EG1 (GY)	Data link, bus positive
13	4-EG8 (GY/VT)	Data link, bus positive
14	4-EG7 (GY/RD)	Data link, bus positive
15	4-FA10 (GY/BK)	Data link, bus positive
16	4-EG10 (GY/BK)	Data link, bus positive
17	4-GL58 (GY/OG)	Data link, bus positive
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used

C224

14401

P60
Joint connector 3

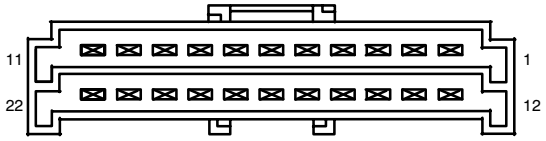

F22015

Pin	Circuit	Circuit Function
1	31-DA3 (BK/OG)	Ground
2	31-AA30 (BK/YE)	Ground
3	31-AD12 (BK)	Ground
4	31-GL36 (BK/BU)	Ground
5	–	not used
6	31S-LC4 (BK/GN)	Ground, Switched
7	31S-LC23 (BK/WH)	Ground, Switched
8	31S-LC11 (BK/WH)	Ground, Switched
9	–	not used
10	–	not used
11	–	not used
12	64S-LE10 (BU/YE)	Variable D.C. voltage (not overload protected), Switched
13	64S-LK1 (BU)	Variable D.C. voltage (not overload protected), Switched
14	64S-LH50 (BU/YE)	Variable D.C. voltage (not overload protected), Switched
15	64S-LK29 (BU/RD)	Variable D.C. voltage (not overload protected), Switched
16	64-LK18 (BU/RD)	Variable D.C. voltage (not overload protected)
17	–	not used
18	–	not used
19	–	not used
20	64S-LH26 (BU/BK)	Variable D.C. voltage (not overload protected), Switched
21	64S-GG25 (BU/OG)	Variable D.C. voltage (not overload protected), Switched
22	–	not used