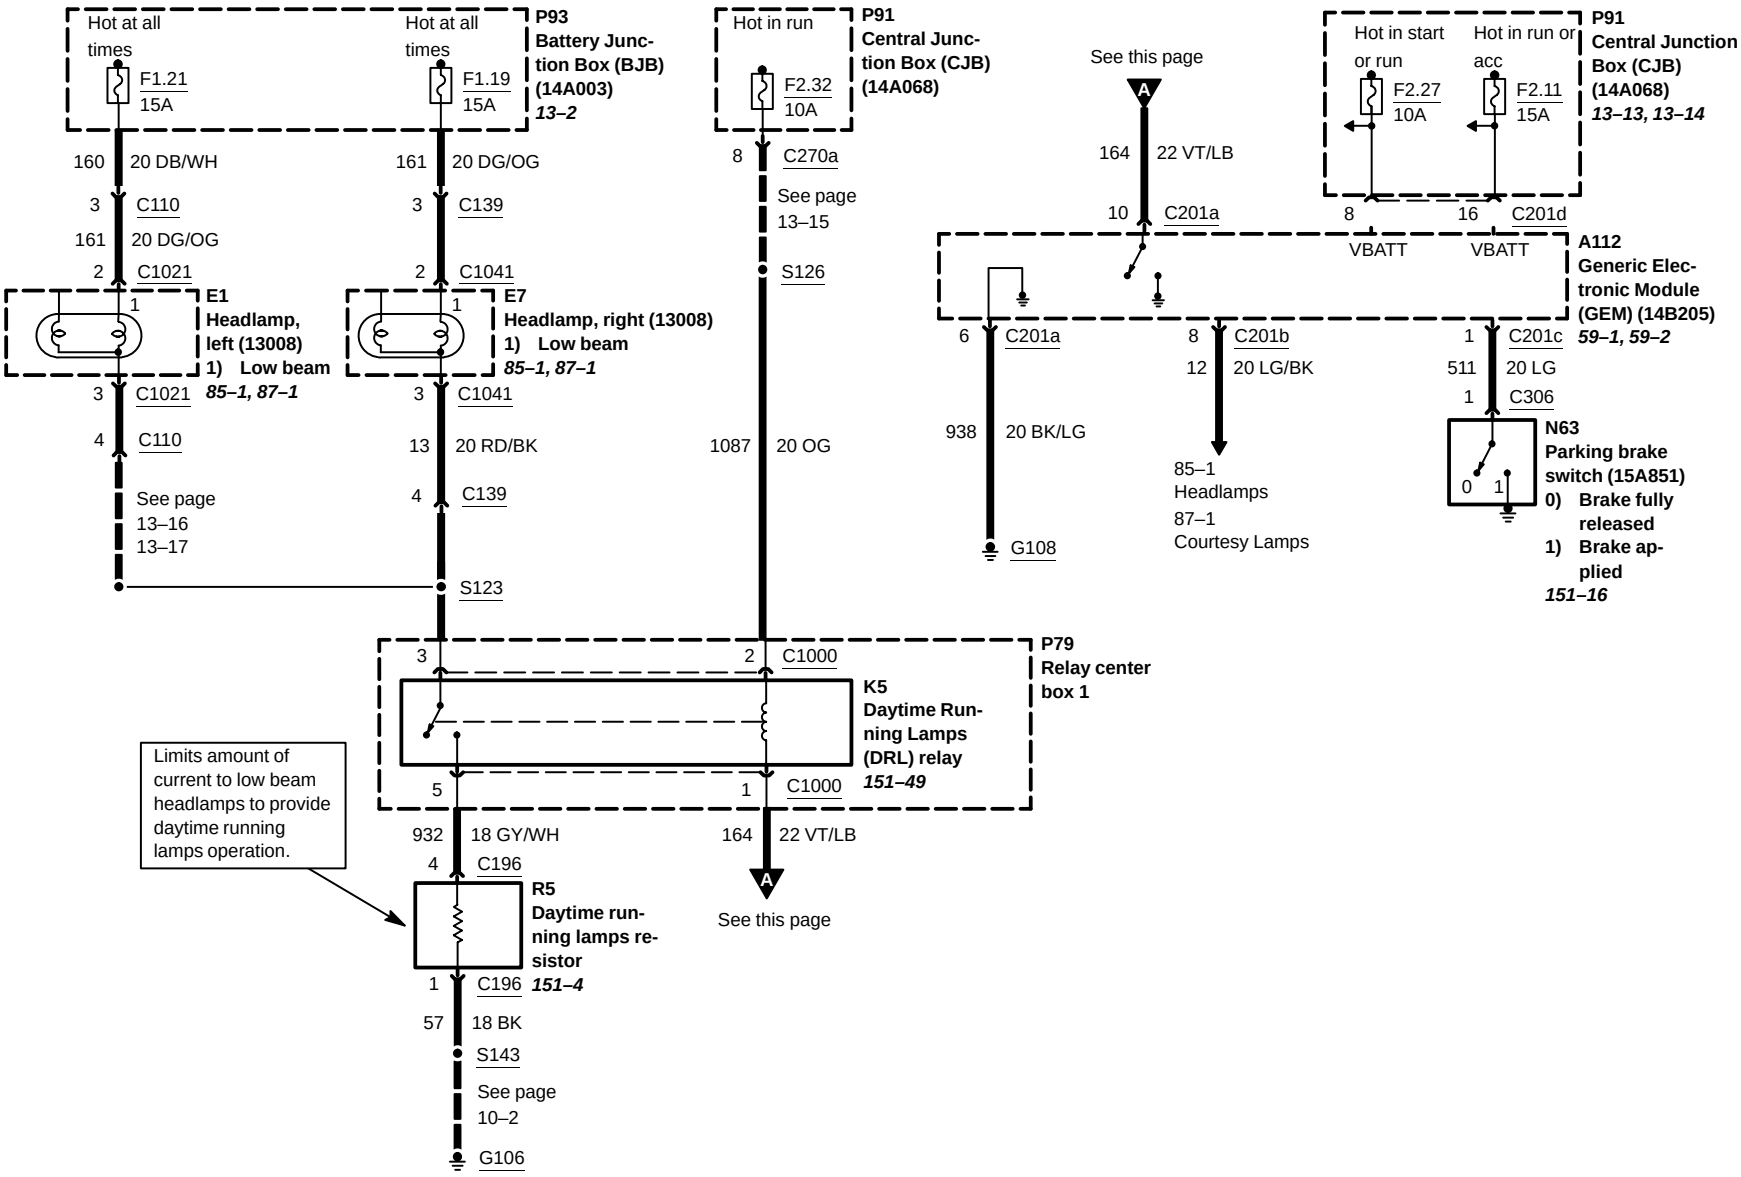
Hot at all times
F1.21
15A
Hot at all times
F1.19
15A
P93
Battery Junction Box (BJB)
(14A003)
13–2
Hot in run
F2.32
10A
P91
Central Junction Box (CJB)
(14A068)
See this page
Hot in start or run
F2.27
10A
Hot in run or acc
F2.11
15A
P91
Central Junction Box (CJB)
(14A068)
13–13, 13–14
160 20 DB/WH
3 C110
161 20 DG/OG
2 C1021
E1
Headlamp, left (13008)
1) Low beam
85–1, 87–1
3 C1021
85–1, 87–1
4 C110
See page 13–16
13–17
161 20 DG/OG
3 C139
2 C1041
E7
Headlamp, right (13008)
1) Low beam
85–1, 87–1
3 C1041
13 20 RD/BK
4 C139
8 C270a
See page 13–15
S126
1087 20 OG
S123
164 22 VT/LB
10 C201a
8 VBATT
16 C201d
VBATT
A112
Generic Electronic Module (GEM) (14B205)
59–1, 59–2
6 C201a
938 20 BK/LG
G108
8 C201b
12 20 LG/BK
85–1
Headlamps
87–1
Courtesy Lamps
1 C201c
511 20 LG
1 C306
N63
Parking brake switch (15A851)
0) Brake fully released
1) Brake applied
151–16
0 1
3 2 C1000
P79
Relay center box 1
K5
Daytime Running Lamps (DRL) relay
151–49
5 1 C1000
Limits amount of current to low beam headlamps to provide daytime running lamps operation.
932 18 GY/WH
4 C196
R5
Daytime running lamps resistor
151–4
1 C196
57 18 BK
S143
See page 10–2
G106
164 22 VT/LB
See this page