* W/MEMORY



C290

ADJUSTABLE PEDAL SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1495 (WH)	Pedal Backward
	*1492 (LB/RD)	Pedal Backward
2	566 (DG)	Power
	*956 (OG/LG)	Power
3	57 (BK)	Ground
	*875 (BK/LB)	Ground
4	57 (BK)	Illumination Ground
5	19 (LB/RD)	Ground
	*875 (BK/LB)	Illumination Ground
6	57 (BK)	Ground
	*875 (BK/LB)	Ground
7	1494 (RD)	Pedal Forward
	*1493 (PK/BK)	Pedal Forward

* W/O MEMORY

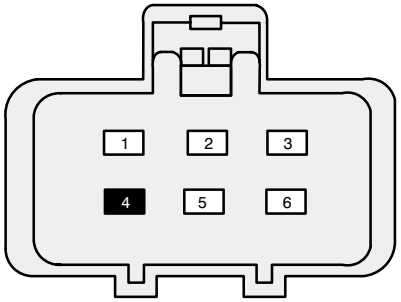

C2001

ADJUSTABLE PEDAL MOTOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	446 (OG/WH)	Seat Position Sensor (+)
2	1491 (LB/YE)	Pedal Sensor
3	447 (OG/RD)	Seat Position Sensor (–)
4	–	NOT USED
5	1490 (LB/OG)	Pedal Backward
	*1495 (WH)	Pedal Backward
6	1489 (LB/BK)	Pedal Forward
	*1494 (RD)	Pedal Forward

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C242	13-29
C351	123-6
C357	123-4