C282

14401

N316
Inertia Fuel Shutoff
(IFS) switch
(9D362)



F03032

Pin	Circuit	Circuit function
1	–	not used
2	787 (PK/BK)	Fuel pump, Power
3	238 (DG/YE)	Fuel pump relay, switched power, output

C286

14401

B72
Sunload sensor
(19E663)



F02431

Pin	Circuit	Circuit function
1	470 (PK/BK)	Sensor signal return (reference/ground)
2	468 (BN)	Sunload sensor (19E663), input

C287

14401

B202
Autolamp sensor

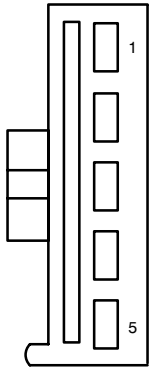

F05135

Pin	Circuit	Circuit function
1	–	not used
2	1525 (LG/RD)	Autolamps, feed, to, Headlamp switch
3	7 (LG/YE)	Headlamp relay, control
4	57 (BK)	Ground
5	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)

C288

18B518

M3
Heater blower motor
(19805)



F02329

Pin	Circuit	Circuit function
1	755 (BN/WH)	Electronic Automatic Temperature Control (EATC) module (19980), to, Front blower motor speed controller (19E624)
2	757 (RD/WH)	Front blower motor speed controller (19E624), to, Blower motor