C124

14290

N1
Brake fluid level switch



F03093

Pin	Circuit	Circuit Function
1	57 (BK)	Ground
2	22 (LB/BK)	Brake feed
3	547 (LG/YE)	Brake indicator, control

C125

14290

M111
Windshield wiper motor



F05091

Pin	Circuit	Circuit Function
1	56 (DB/OG)	Wiper high/low relay, switched power, output, High
2	58 (WH)	Wiper high/low relay, switched power, output, Low
3	57 (BK)	Ground
4	950 (WH/BK)	Voltage in Run or Accessory (overload protected)
5	65 (DG)	Wiper park relay, switched power, input

C127

14290

N415
Anti–theft hood switch



F02069

Pin	Circuit	Circuit Function
1	23 (TN/LG)	Anti–theft, switch sense
2	57 (BK)	Ground

C128

12B637

B22
Mass Air Flow (MAF) sensor

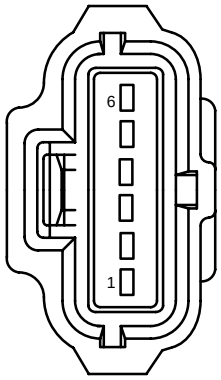

F06077

Pin	Circuit	Circuit Function
1	359 (GY/RD)	signal, return
2	361 (RD)	Voltage supplied in Start and Run (overload protected)
3	570 (BK/WH)	Ground
4	968 (TN/LB)	Mass Air Flow (MAF) sensor, signal, return
5	967 (LB/RD)	Mass Air Flow (MAF) sensor, output
6	743 (GY)	Intake Air Temperature (IAT) sensor, input

C130 (BN)

14290

N412
A/C clutch cycling pressure switch



F04195

Pin	Circuit	Circuit Function
1	348 (VT)	A/C demand signal
2	–	not used
3	–	not used
4	441 (RD/YE)	A/C pressure switch, to A/C cycling switch

C131

14290

H1
Horn



F02069

Pin	Circuit	Circuit Function
1	6 (YE/LG)	Horn relay, switched power, output
2	57 (BK)	Ground