C261

14401

P52
Joint connector 1

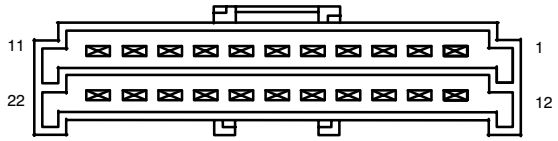

F22015

Pin	Circuit	Circuit function
1	9-FA2 (BN/RD)	Sensor signal return (reference/ground)
2	9-FB7 (BN)	Sensor signal return (reference/ground)
3	9-FB6 (BN/WH)	Sensor signal return (reference/ground)
4	9-FB5 (BN/YE)	Sensor signal return (reference/ground)
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	9-FA3 (BN/BU)	Sensor signal return (reference/ground)
13	9-FA51 (BN/YE)	Sensor signal return (reference/ground)

Pin	Circuit	Circuit function
14	9-FA47 (BN/GN)	Sensor signal return (reference/ground)
15	9-FA53 (BN/BU)	Sensor signal return (reference/ground)
16	–	not used
17	29S-LB8 (OG)	Voltage supplied at all times (overload protected), Switched
18	29S-LC23 (OG/WH)	Voltage supplied at all times (overload protected), Switched
19	29S-LC1 (OG/YE)	Voltage supplied at all times (overload protected), Switched
20	15-LE42 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected)
21	15-LE4 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected)
22	15-CC16 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)