C270c

14401

P91
Central Junction
Box (CJB)

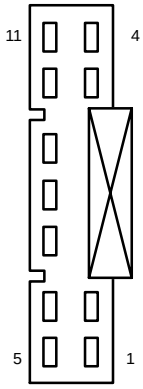

F11025

Pin	Circuit	Circuit Function
1	40 (LB/WH)	Voltage in Run or Accessory (overload protected)
2	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
3	704 (DG/LG)	Voltage supplied in Start and Run (overload protected)
4	41 (BK/LB)	Voltage supplied in Start and Run (overload protected)
5	-	not used
6	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
7	950 (WH/BK)	Voltage supplied in Start and Run (overload protected)
8	296 WH/VT)	Voltage supplied in Start and Run (overload protected)
9	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
10	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
11	8 (OG/YE)	Voltage supplied in Start and Run (overload protected)

C270d

14401

P91
Central Junction
Box (CJB)

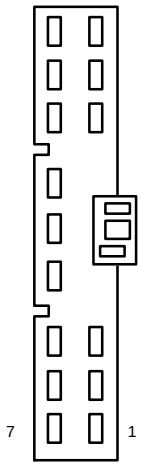

F15011

Pin	Circuit	Circuit Function
1	32 (RD/LB)	Voltage supplied at all times (overload protected)
2	218 (WH/VT)	Autolamp relay, control
3	383 (RD/WH)	Emergency warning flasher, feed
4	601 (LB/PK)	Voltage supplied in Start and Run (overload protected)
5	162 (LG/RD)	Park brake switch
6	3 (LG/WH)	Turn lamps, feed, left front
7	1050 (LG/VT)	Voltage supplied at all times (overload protected)
8	1359 (DG/VT)	Rear wiper relay, control
9	6 (YE/LG)	Horn relay, switched power, output
10	-	not used
11	919 (GY/BK)	Instrument illumination, feed
12	140 (BK/PK)	Voltage supplied in reverse
13	2 (WH/LB)	Turn lamps, feed, right front
14	956 (OG/LG)	Voltage supplied at all times (overload protected)
15	306 (TN/LB)	Voltage supplied in Start (overload protected)