## C224

**14401**

P60
Joint connector 3

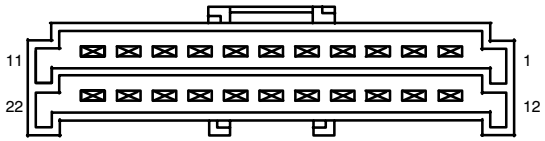


F22015

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 31-DA3 (BK/OG) | Ground |
| 2 | 31-AA30 (BK/YE) | Ground |
| 3 | 31-AD12 (BK) | Ground |
| 4 | 31-GL36 (BK/BU) | Ground |
| 5 | – | not used |
| 6 | 31S-LC4 (BK/GN) | Ground, Switched |
| 7 | 31S-LC23 (BK/WH) | Ground, Switched |
| 8 | 31S-LC11 (BK/WH) | Ground, Switched |
| 9 | – | not used |
| 10 | – | not used |
| 11 | – | not used |

| Pin | Circuit | Circuit function |
|---|---|---|
| 12 | 64S-LE10 (BU/YE) | Variable DC voltage (not overload protected), Switched |
| 13 | 64S-LK1 (BU) | Variable DC voltage (not overload protected), Switched |
| 14 | 64S-LH50 (BU/YE) | Variable DC voltage (not overload protected), Switched |
| 15 | 64S-LK29 (BU/RD) | Variable DC voltage (not overload protected), Switched |
| 16 | 64-LK18 (BU/RD) | Variable DC voltage (not overload protected) |
| 17 | – | not used |
| 18 | – | not used |
| 19 | – | not used |
| 20 | 64S-LH26 (BU/BK) | Variable DC voltage (not overload protected), Switched |
| 21 | 64S-GG25 (BU/OG) | Variable DC voltage (not overload protected), Switched |
| 22 | – | not used |