C282

14A005

N316
Inertia Fuel Shutoff
(IFS) switch
(9D362)



F03032

Pin	Circuit	Circuit function
1	–	not used
2	238 (DG/YE)	Fuel pump relay, switched power, output
3	787 (PK/BK)	Fuel pump, Power

C285a

14290

P74
Stud, junction box



F01115

Pin	Circuit	Circuit function
1	290 (GY 12)	Voltage supplied at all times (fusible link)

C285b

14290

P74
Stud, junction box



F01115

Pin	Circuit	Circuit function
1	38 (BK/OG 6)	Voltage supplied at all times (overload protected)

C286

14401

B72
Sunload sensor
(19E663)



F02071

Pin	Circuit	Circuit function
1	470 (PK/BK)	Sensor signal return (reference/ground)
2	468 (BN)	Sunload sensor (19E663), input

C287

14401

B202
Autolamp sensor

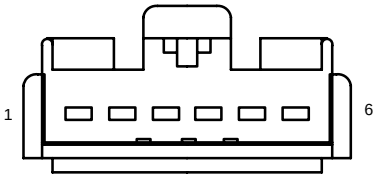

F06086

Pin	Circuit	Circuit function
1	676 (PK/OG)	Ground
2	1269 (OG/RD)	Anti–theft, indicator, input
3	195 (TN/WH)	Voltage supplied at all times (overload protected)
4	218 (WH/VT)	Autolamp sensor, output
5	–	not used
6	705 (LG/OG)	Battery saver relay, switched power