

A portable manuscript template for the publication lifecycle

R. Duarte ^{1,2}

¹CNC-UC – Center for Neuroscience and Cell Biology, University of Coimbra, 3004-504 Coimbra, Portugal

²CIBB – Centre for Innovative Biomedicine and Biotechnology, University of Coimbra, 3004-504 Coimbra, Portugal

Correspondence: rcfduarte@gmail.com

Abstract

This is the canonical abstract. Replace it with the manuscript abstract. It is shared across all journal builds unless a journal-specific override exists at `variants/<journal>/abstract.tex`.

Keywords: computational neuroscience; reproducibility; manuscript preparation

Significance Statement

A short, lay-accessible statement of why this work matters (~75–200 words, journal-dependent). Required by PLOS (Author Summary), J Neuroscience / eNeuro (Significance Statement), and PNAS (Significance). Delete this block for journals that do not use it.

1 Introduction

The introduction motivates the work and states the contribution. Cite with `biblatex`, e.g. a foundational result [1]. Section content lives in its own file under `sections/` so it can be reordered or overridden per journal.

2 Results

Results go here. Refer to figures, tables, equations and other sections with `cleveref`, e.g. Section 4 describes the procedure, Fig. 1 shows the response, Table 1 summarizes the parameters, and the model is given by Eq. (1).

The membrane potential V evolves according to a leaky integrator,

$$\tau \frac{dV}{dt} = -(V - V_{\text{rest}}) + RI(t), \quad (1)$$

with membrane time constant τ , resting potential V_{rest} , input resistance R , and input current $I(t)$. For an unnumbered display, use `\[ ... \]` or the `equation*` environment.

Table 1. Example parameters. A `booktabs` table; its caption also uses the `caption` package at `small` font. Table captions go *above* the tabular by convention.

Parameter	Symbol	Value
Membrane time constant	τ	20 ms
Resting potential	V_{rest}	−65 mV
Input resistance	R	100 MΩ

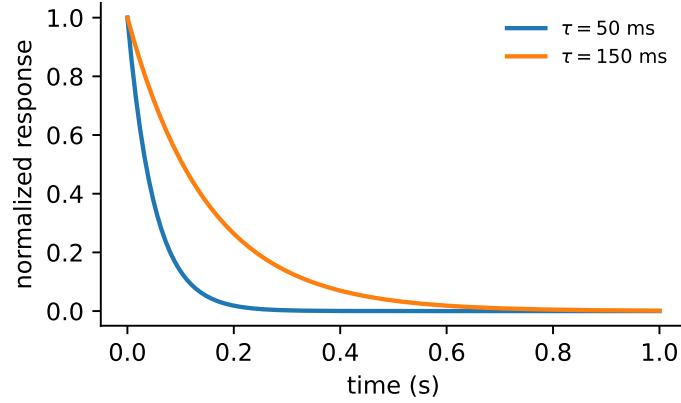


Figure 1. Example figure. Normalized response of Eq. (1) to a step input for two membrane time constants. Replace `figures/example-figure.pdf` with your own (regenerate via `scripts/make-example-figure.py`). Captions use the `caption` package at small font.

3 Discussion

The discussion interprets the results and situates them in the literature.

4 Methods

Methods describe the procedure in enough detail to reproduce it.

Acknowledgements

This work was co-funded by the EU Recovery and Resilience Facility and Portuguese national funds via FCT – Fundação para a Ciência e a Tecnologia, under projects LA/P/0058/2020 [DOI: 10.54499/LA/P/0058/2020], UID/PRR/4539/2025 [DOI: 10.54499/UID/PRR/04539/2025] and UID/04539/2025. This work is funded by national funds via the FCT – Foundation for Science and Technology, I.P., under project 2023.13758.PEX (HetSyn).

Competing interests. The authors declare no competing interests.

Author contributions. R.D.: Conceptualization, Methodology, Software, Formal analysis, Writing – original draft.

Data availability. All data supporting this study are available at <https://doi.org/10.5281/zenodo.XXXXXXX>.

Code availability. Model and analysis code are available at <https://github.com/CNNC-Lab/...> and archived at <https://doi.org/10.5281/zenodo.XXXXXXX>.

References

- [1] J. Doe and R. Roe. “An example reference for the template”. In: *Journal of Examples* 1 (2025), pp. 1–10.

Supplementary Material

Supplementary Methods

Additional methodological detail (e.g. full parameter tables, derivations, model descriptions) that supports but is not essential to the main text.

Supplementary Figures

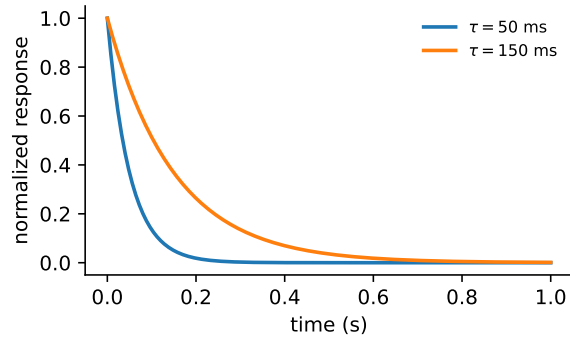


Figure S1. Supplementary example figure. Numbered Fig. S1 (i.e. Fig. S1), independently of the main-text figures.

Supplementary Tables

Table S1. Supplementary example table. Numbered Table S1 (Table S1). Parameter tables are the most common supplement in modelling papers.

Parameter	Symbol	Value
Number of neurons	N	10 000
Connection density	ϵ	0.1
Synaptic delay	d	1.5 ms