C270b

14A005

P91
Central Junction
Box (CJB) (14A068)

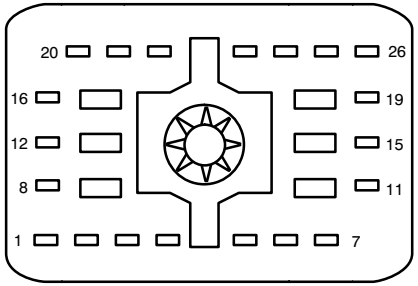

F26017

Pin	Circuit	Circuit Function
1	–	not used
2	29-CF58 (OG/GN)	Voltage supplied at all times (overload protected)
3	29S-DK22 (OG/YE)	Voltage supplied at all times (overload protected), Switched
4	–	not used
5	–	not used
6	–	not used
7	15-DA5 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
8	–	not used
9	30-DD2 (RD/BU)	Voltage supplied at all times (not overload protected)
10	30-DD1 (RD/YE)	Voltage supplied at all times (not overload protected)
11	–	not used
12	–	not used
13	29-HA6 (OG/YE)	Voltage supplied at all times (overload protected)
14	–	not used

Pin	Circuit	Circuit Function
15	29-AA17 (OG/WH)	Voltage supplied at all times (overload protected)
16	–	not used
17	30-DD3 (RD/OG)	Voltage supplied at all times (not overload protected)
18	–	not used
19	–	not used
20	–	not used
21	29S-LB19 (OG/BU)	Voltage supplied at all times (overload protected), Switched
22	29S-LC5 (OG/BU)	Voltage supplied at all times (overload protected), Switched
23	15-RP1 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected)
24	–	not used
25	–	not used
26	–	not used