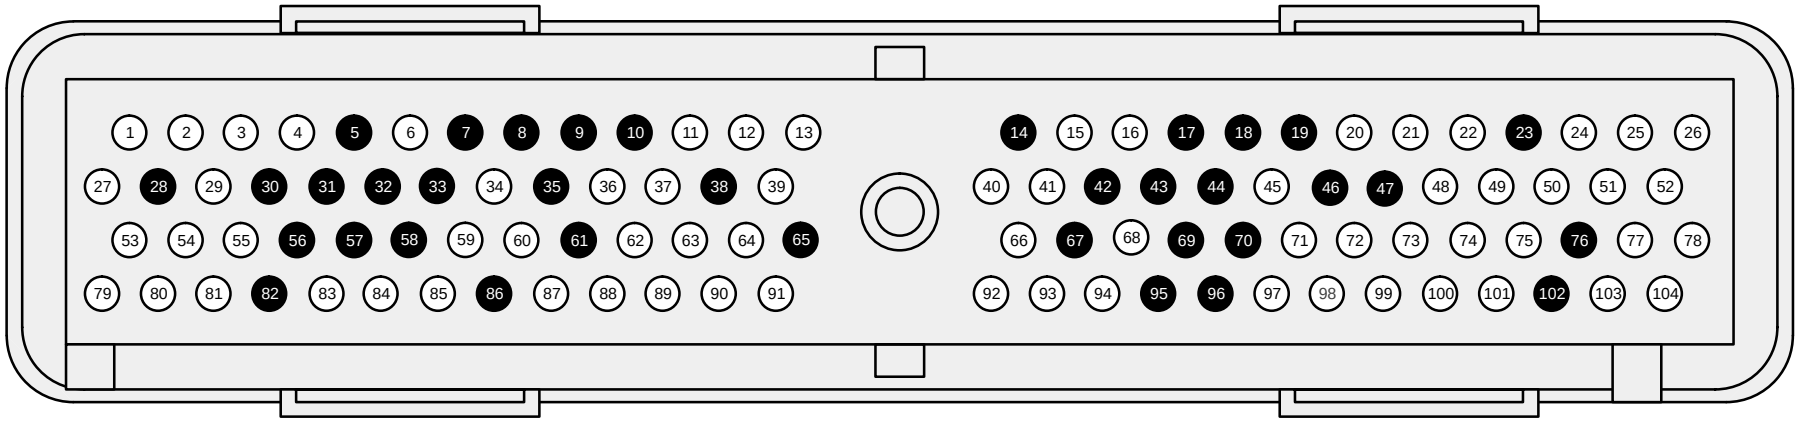


**C154**

**POWERTRAIN CONTROL MODULE (PCM)**

**5.4L NGV**

| PIN | CIRCUIT | CIRCUIT FUNCTION | PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|---|---|---|
| 1 | 1025 (OG/YE) | Coil On Plug #6 | 20 | 924 (BN/OG) | Coast Clutch Solenoid |
| 2 | 658 (PK/LG) | MIL Lamp Control | 21 | 349 (DB) | Crankshaft Position Sensor (+) |
| 3 | 570 (BK/WH) | Ground | 22 | 350 (GY) | Crankshaft Position Sensor (–) |
| 4 | 828 (VT/LB) | Auxiliary Power Feed | 23 | – | NOT USED |
| 5 | – | NOT USED | 24 | 570 (BK/WH) | Ground |
| 6 | 237 (OG/YE) | Shift Solenoid A | 25 | 875 (BK/LB) | Ground |
| 7 | – | NOT USED | 26 | 1024 (LG/WH) | Coil On Plug #1 |
| 8 | – | NOT USED | 27 | 1021 (LG/YE) | Coil On Plug #5 |
| 9 | – | NOT USED | 28 | – | NOT USED |
| 10 | – | NOT USED | 29 | 224 (TN/WH) | Transmission Control Switch |
| 11 | 315 (VT/OG) | Shift Solenoid B | 30 | – | NOT USED |
| 12 | 911 (WH/LG) | Transmission Control Switch | 31 | – | NOT USED |
| 13 | 107 (VT) | Generic Scan Tool Input | 32 | – | NOT USED |
| 14 | – | NOT USED | 33 | – | NOT USED |
| 15 | 915 (PK/LB) | Bus (–) | 34 | 1144 (YE/BK) | Digital Transmission Range (DTR) Sensor (TR1) |
| 16 | 914 (TN/OG) | Bus (+) | | | |
| 17 | – | NOT USED | 35 | – | NOT USED |
| 18 | – | NOT USED | 36 | 968 (TN/LB) | Mass Air Flow (MAF) Sensor Return |
| 19 | – | NOT USED | | | |

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 37 | 923 (OG/BK) | Transmission Fluid Temperature Sensor |
| 38 | – | NOT USED |
| 39 | 743 (GY) | Intake Air Temperature Input |
| 40 | 238 (DG/YE) | Fuel Pump Monitor |
| 41 | 347 (BK/YE) | A/C ON Input Signal |
| 42 | – | NOT USED |
| 43 | – | NOT USED |
| 44 | – | NOT USED |
| 45 | 1105 (YE/LB) | Engine Coolant Temperature Sensor |
| 46 | – | NOT USED |
| 47 | – | NOT USED |
| 48 | 648 (WH/PK) | RPM Sensor Feed |
| 49 | 1145 (LB/BK) | Digital Transmission Range (DTR) Sensor (TR2) |
| 50 | 1146 (LG/RD) | Digital Transmission Range (DTR) Sensor (TR4) |
| 51 | 570 (BK/WH) | Ground |
| 52 | 1028 (WH/PK) | Coil On Plug #3 |
| 53 | 1030 (DG/PK) | Coil On Plug #4 |
| 54 | 480 (VT/YE) | Torque Converter Clutch (TCC) Solenoid |
| 55 | 37 (YE) | Keep Alive Power Input |
| 56 | – | NOT USED |
| 57 | – | NOT USED |
| 58 | – | NOT USED |
| 59 | 970 (DG/WH) | Turbine Shaft Speed (TSS) Sensor |
| 60 | 74 (GY/LB) | HEGO #11 |
| 61 | – | NOT USED |
| 62 | 1164 (LB) | Fuel Rail Temperature Sensor |
| 63 | 141 (RD/PK) | Injection Pressure Sensor (IPS) |
| 64 | 199 (LB/YE) | Digital Transmission Range (DTR) Sensor (TR3A) |
| 65 | – | NOT USED |
| 66 | 1102 (YE/LG) | Cylinder Head Temperature Sensor |
| 67 | – | NOT USED |
| 68 | 679 (GY/BK) | Vehicle Speed Control |

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 69 | – | NOT USED |
| 70 | – | NOT USED |
| 71 | 361 (RD) | Power Input |
| 72 | 561 (TN/RD) | Fuel Injector #7 |
| 73 | 559 (TN/BK) | Fuel Injector #5 |
| 74 | 557 (BN/YE) | Fuel Injector #3 |
| 75 | 555 (TN) | Fuel Injector #1 |
| 76 | – | NOT USED |
| 77 | 570 (BK/WH) | Ground |
| 78 | 1027 (PK/LB) | Coil On Plug #7 |
| 79 | 1029 (WH/RD) | Coil On Plug #8 |
| 80 | 926 (LB/OG) | Fuel Shutoff Valve Control |
| 81 | 925 (WH/YE) | Electronic Pressure Control (EPC) Solenoid |
| 82 | – | NOT USED |
| 83 | 264 (WH/LB) | Idle Air Control (IAC) Valve |
| 84 | 136 (DB/YE) | Output Shaft Speed (OSS) Sensor |
| 85 | 795 (DG) | Cylinder Identification Sensor |
| 86 | – | NOT USED |
| 87 | 94 (RD/BK) | HEGO #21 |
| 88 | 967 (LB/RD) | Mass Air Flow (MAF) Sensor |
| 89 | 355 (GY/WH) | Throttle Position (TP) Sensor |
| 90 | 351 (BN/WH) | Reference Output Voltage |
| 91 | 359 (GY/RD) | Sensor Signal Return |
| 92 | 511 (LG) | Brake pedal position (BPP) Switch |
| 93 | 387 (RD/WH) | HEGO #11 Voltage Monitor |
| 94 | 388 (YE/LB) | HEGO #21 Voltage Monitor |
| 95 | – | NOT USED |
| 96 | – | NOT USED |
| 97 | 361 (RD) | Power Input |
| 98 | 562 (LB) | Fuel Injector #8 |
| 99 | 560 (LG/OG) | Fuel Injector #6 |
| 100 | 558 (BN/LB) | Fuel Injector #4 |
| 101 | 556 (WH) | Fuel Injector #2 |
| 102 | – | NOT USED |
| 103 | 570 (BK/WH) | Ground |
| 104 | 1026 (PK/WH) | Coil On Plug #2 |