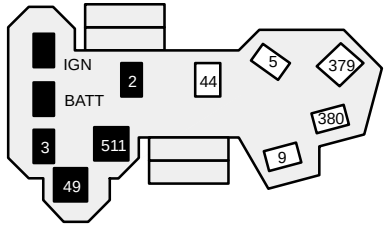

C217
MULTIFUNCTION SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
BATT	–	NOT USED
IGN	–	NOT USED
2	–	NOT USED
3	–	NOT USED
5	2 (WH/LB)	Right Turn Indicator and Lamps
9	3 (LG/WH)	Left Turn Indicator and Lamps
44	44 (LB)	Electronic Flasher Output
49	–	NOT USED
379	1042 (RD/OG)	Right Turn Feed
380	1041 (BN/OG)	Left Turn Feed
511	–	NOT USED



C214
FLASHER RELAY

PIN	CIRCUIT	CIRCUIT FUNCTION
1	44 (LB)	Flasher Output (Turn)
2	383 (RD/WH)	Power (Hot at All Times)
3	–	NOT USED
4	57 (BK)	Ground
5	1344 (VT/LB)	Power (Hot in Run)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C186	42-3
C202	24-8
C286	62-6
C287	62-6