C240c

14401

Audio unit, CDX6



F8OB-14A464-GA (F)

Pin	Circuit	Circuit Function
1	172 (LB/RD)	Radio- sub-woofer low audio (-)
2	167 (BN/OG)	Radio- sub-woofer high audio (+)
3	48 (Bare)	Drain wire - shield (bare wire)
4	168 (RD/BK)	Radio- sub-woofer high audio (-)
5	—	not used
6	—	not used
7	—	not used
8	—	not used

C250

14401

Ignition switch



98AG-14489-ZGB (F)

Pin	Circuit	Circuit Function
1	16 (RD/LG)	Ignition switch to ignition coil 'batt' terminal
2	—	not used
3	158 (BK/PK)	Key warning switch
4	37 (YE)	Battery to load
5	1414 (LG/VT)	Instrument cluster module: key warning switch input
6	687 (GY/YE)	Accessory feed
7	1522 (DG)	Fused ignition start only power

C251

14401

Data Link Connector
(DLC), OBD II

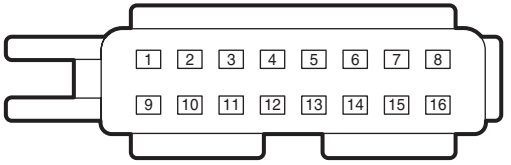

3C5T-14489-AA (F)

Pin	Circuit	Circuit Function
1	—	not used
2	914 (TN/OG)	J1850 bus plus/data plus
3	693 (OG)	Module diagnostic
4	1205 (BK)	General ground (type 4 ground)
5	570 (BK/WH)	Communication network ground (type 1 ground)
6	—	not used
7	70 (LB/WH)	ISO 9141 link
8	—	not used
9	—	not used
10	915 (PK/LB)	J1850 bus minus/data minus
11	—	not used
12	—	not used
13	209 (WH/VT)	Module, powertrain control to self test connector
14	—	not used
15	—	not used
16	1001 (WH/YE)	Fused battery feed to module, GEM-input