C270a

14290

P91
Central Junction
Box (CJB)

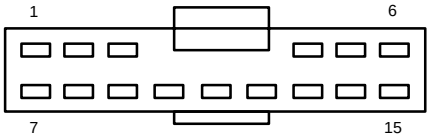

F15017

Pin	Circuit	Circuit Function
1	406 (BN/WH)	Voltage supplied in Start and Run (overload protected)
2	-	not used
3	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
4	162 (LG/RD)	Park brake switch
5	1 (DB)	Horn relay, control
6	601 (LB/PK)	Voltage supplied in Start and Run (overload protected)
7	-	not used
8	-	not used
9	-	not used
10	-	not used
11	306 (TN/LB)	Voltage supplied in Start (overload protected)
12	2 (WH/LB)	Turn lamps, feed, right front
13	3 (LG/WH)	Turn lamps, feed, left front
14	-	not used
15	-	not used

C270b

14290

P91
Central Junction
Box (CJB)

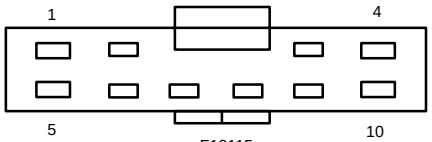

F10115

Pin	Circuit	Circuit Function
1	1052 (TN/BK)	Fused battery feed, to Central Junction Box (CJB)
2	-	not used
3	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
4	785 (BK/LG)	Voltage supplied at all times (overload protected)
5	950 (WH/BK)	Voltage supplied in Start and Run (overload protected)
6	140 (BK/PK)	Voltage supplied in reverse
7	-	not used
8	-	not used
9	14 (BN)	Power, Exterior lamps
10	37 (YE)	Voltage supplied at all times (overload protected)