C1199

12A581

K356
Trailer tow relay,
parking lamp



F05110

Pin	Circuit	Circuit function
1	14 (BN)	Power, Exterior lamps
2	57 (BK)	Ground
3	1043 (DG/YE)	Voltage supplied at all times (overload protected)
4	–	not used
5	962 (BN/WH)	Trailer tow relay, parking lamp, switched output

C1200

12A581

K355
Trailer tow relay,
battery charge



F05051

Pin	Circuit	Circuit function
30	175 (BK/YE)	Voltage supplied at all times (overload protected)
85	57 (BK)	Ground
86	294 (WH/LB)	Voltage in Run (overload protected)
87	49 (OG)	Trailer tow relay, battery charge, switched output
87a	–	not used

C1214

12A581

R31
Dropping resistor



F04263

Pin	Circuit	Circuit function
1	922 (WH/RD)	Fuel pump, control
2	–	not used
3	–	not used
4	57 (BK)	Ground

C1216

12A581

K372
Charge air cooler
pump relay



F05110

Pin	Circuit	Circuit function
1	369 (WH/OG)	Charge air cooler pump relay, control
2	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
3	18 (OG/YE)	Voltage supplied at all times (overload protected)
4	–	not used
5	17 (WH)	Charge air cooler pump relay, switched output

C1217

12A581

M275
Charge air cooler
pump motor

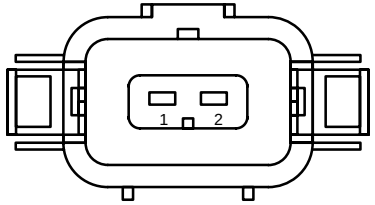

F02084

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	17 (WH)	Charge air cooler pump relay, switched output

C1218

K233
Fuel pump cutoff
relay



F05051