Component Testing – Multifunction Switch, Turn Portion (continued)

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch will Indicate
Turn Signal	6 and 8	Left Turn	Closed Circuit
	6 and 10	Off	Open Circuit
	6 and 5	Right Turn	Closed Circuit
	6 and 2	Off	Open Circuit
Hazard	4 and 11	Turn Signal Switch in Neutral, Hazard On	Closed Circuit
	6 and 8		
	6 and 5		
	6 and 10		
	6 and 2		
	1 and 11	Turn Signal Switch in Neutral, Hazard On	Open Circuit
	9 and 10		
	9 and 2		
	4 and 11	Turn Signal Switch in Neutral, Hazard Off	Open Circuit
	1 and 11	Turn Signal Switch in Neutral, Hazard Off	Closed Circuit
	9 and 10		
	9 and 2		
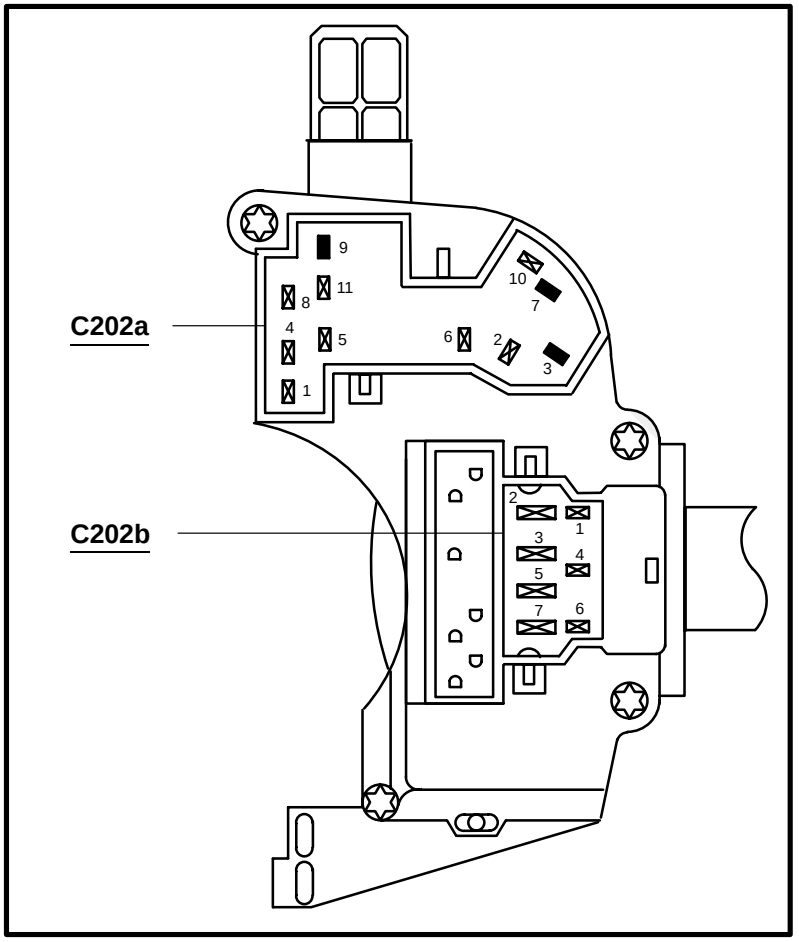
TERMINAL LOCATIONS