C808b (WH)

14K024

A30
Instrument cluster

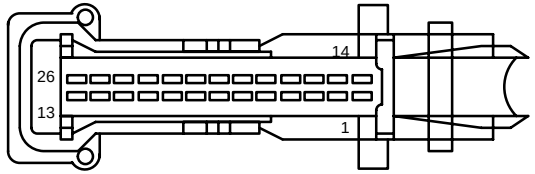

F26002

Pin	Circuit	Circuit function
1	9-GE38 (BN/YE)	Sensor signal return (reference/ground)
2	91-GG14B (BK/OG)	Ground
3	91-GA7 (BK/BU)	Ground
4	15S-BA9 (GN/BK)	Voltage, ignition switch in Start or Run (not overload protected), Switched
5	31S-GC21 (BK/GN)	Ground, Switched
6	31S-GC6 (BK/YE)	Ground, Switched
7	31S-CF28 (BK/RD)	Ground, Switched
8	64S-LK29 (BU/RD)	Variable D.C. voltage (not overload protected), Switched
9	8-RE22A (WH/VT)	Sensor signal
10	8-GG8 (WH/GN)	Sensor signal
11	8-GG10 (WH/VT)	Sensor signal
12	8-GG9 (WH/BK)	Sensor signal
13	8-GG7 (WH/BU)	Sensor signal

Pin	Circuit	Circuit function
14	29-GG14 (OG)	Voltage supplied at all times (overload protected)
15	15-GG14 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected)
16	91-GG14A (BK/OG)	Ground
17	31S-CF45 (BK/GN)	Ground, Switched
18	31S-GE49 (BK/BU)	Ground, Switched
19	49-LG22 (BU/YE)	Pulsed power feed (overload protected)
20	8-GE38 (WH/BK)	Sensor signal
21	8-GA7A (WH/RD)	Sensor signal
22	75-GG14 (YE/BU)	Voltage: Ignition switch in Accessory or Run
23	8-GA15 (WH/RD)	Sensor signal
24	–	not used
25	29S-LE11 (OG/WH)	Voltage supplied at all times (overload protected), Switched
26	8-GB8 (WH/BU)	Sensor signal