C1017

14290

K22
Starter relay



F05078

Pin	Circuit	Circuit Function
30	30-BB13 (RD/OG)	Voltage supplied at all times (not overload protected)
85	31S-BB12 (BK/YE)	Ground, Switched
86	50S-BB12 (GY)	Voltage, ignition switch in Start (not overload protected), Switched
87	50-BB10 (GY)	Voltage, ignition switch in Start (not overload protected)
87A	–	not used

C1018

14290

V34
PCM Module power diode



F02009

Pin	Circuit	Circuit Function
1	15-RD6 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
2	15-RH9 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected)

C1019 (GY)

12B637

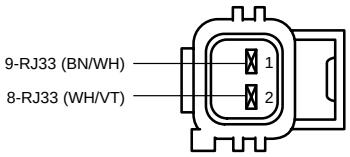

F02121

14B102

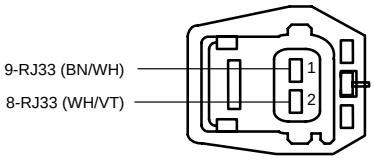

F02055

C1020

13076

E204
High beam lamp, left front

F02037

Pin	Circuit	Circuit Function
1	29S-LE15 (OG/BK)	Voltage supplied at all times (overload protected), Switched
2	31S-LE15 (BK/GN)	Ground, Switched

C1021

13076

E205
Low beam lamp, left front



F02037

Pin	Circuit	Circuit Function
1	29S-LE16 (OG/GN)	Voltage supplied at all times (overload protected), Switched
2	31S-LE16 (BK/RD)	Ground, Switched