C274a

14401
14A005
14A488

A262
Central security module

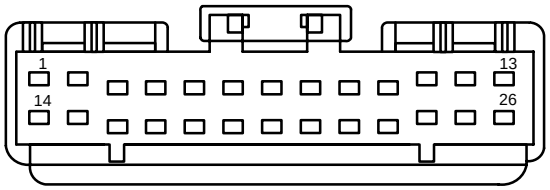

F26014

Pin	Circuit	Circuit function
1	163 (RD/OG)	Driver door unlock relay, switched power
2	–	not used
3	70 (LB/WH)	ISO Bus
4	–	not used
5	78 (LB/YE)	Key pad common
6	79 (LG/RD)	Key pad common
7	–	not used
8	–	not used
9	–	not used
10	6 (YE/LG)	Horn relay, control
11	999 (LB/WH)	GEM/Central security module door ajar, signal
12	140 (BK/PK)	Voltage supplied in reverse
13	–	not used
14	57 (BK)	Ground
15	124 (BN)	Key pad common
16	–	not used
17	–	not used
18	–	not used
19	121 (YE/BK)	Key pad common
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	–	not used
25	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
26	810 (RD/LG)	Brake pedal position switch (13480), input

C274b

14401
14A005
14A488

A262
Central security module

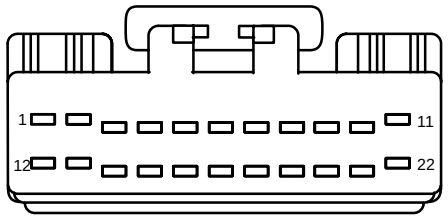

F22017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	218 (WH/VT)	Park lamp relay, control
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	120 (PK/LG)	Door unlock, switch, input
10	1013 (BN/LG)	GEM/Central security module illumination, signal
11	118 (PK/OG)	Door unlock, output
12	171 (BK/WH)	Voltage supplied at all times (overload protected)
	1679 (WH/YE)	
13	651 (BK/YE)	Ground
	570 (BK/WH)	
14	–	not used
15	66 (LB)	Key pad common
16	–	not used
17	119 (PK/YE)	Door lock, switch, input
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	117 (PK/BK)	Door lock, output