C251

14B242

D20
Data Link Connector
(DLC) (14489)

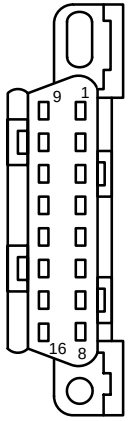

F16063

Pin	Circuit	Circuit Function
1	–	not used
2	914 (TN/OG)	SCP Bus +
3	–	not used
4	57 (BK)	Ground
5	875 (BK/LB)	Ground
6	–	not used
7	70 (LB/WH)	ISO Bus
8	–	not used
9	–	not used
10	915 (PK/LB)	SCP Bus –
11	–	not used
12	–	not used
13	107 (VT)	Module programming signal
14	–	not used
15	–	not used
16	1047 (LG/RD)	Voltage supplied at all times (overload protected)

C252

14B242

A102
Passive anti–theft
transceiver module
(15607)



F04155

Pin	Circuit	Circuit Function
1	875 (BK/LB)	Ground
2	1266 (RD/YE)	Voltage supplied in Start and Run (overload protected)
3	1216 (GY/OG)	RX, signal
4	1215 (WH/LG)	TX, signal

C253

14B242

N404
Message center
switch



F08183

Pin	Circuit	Circuit Function
1	19 (LB/RD)	Illumination
2	676 (PK/OG)	Message center switch, to, Instrument cluster
3		not used
4	715 (LG)	Message center switch, to, Instrument cluster
5	143 (LB/YE)	Message center switch, to, Instrument cluster
6	57 (BK)	Ground
7	–	not used
8	–	not used