C201e

14A005

A213
Front Electronic
Module (FEM)
(13C788)

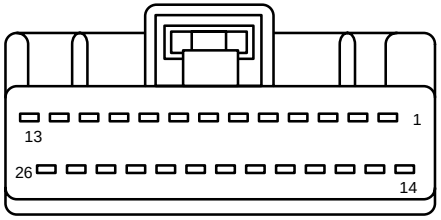

F26019

Pin	Circuit	Circuit function
1	64S-LH1 (BU)	Variable DC voltage (not overload protected), Switched
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	8-AD19 (WH/RD)	Sensor signal
8	7-AD19 (YE/RD)	Voltage DC supplied at all times (sensor)
9	–	not used
10	10-AJ18 (GY/WH)	Signal 2 (Y–direction, reverse, downward)
11	10-AD19 (GY/RD)	Signal 2 (Y–direction, reverse, downward)
12	–	not used
13	–	not used
14	–	not used

Pin	Circuit	Circuit function
15	31S-GL47 (BK/BU)	Ground, Switched
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	34-AD11 (BU/OG)	Switched between: Battery voltage, Ground or Open
21	35-AD11 (VT/WH)	Switched between: Battery voltage, Ground or Open
22	9-AD19 (BN/RD)	Sensor signal return (reference/ground)
23	32-AD10 (WH/BK)	Switched between: Battery voltage, Ground or Open
24	33-AD10 (YE/BK)	Switched between: Battery voltage, Ground or Open
25	8-AJ18 (WH/VT)	Sensor signal
26	–	not used