C201a (GY)

14401

A112
Generic Electronic
Module (GEM)

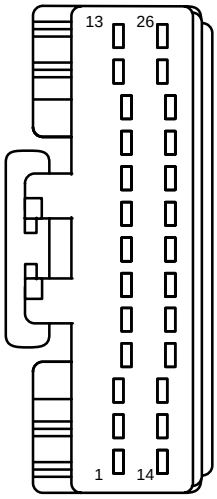

F26015

Pin	Circuit	Circuit Function
1	1010 (DB/OG)	Rear window defrost switch, input
2	–	not used
3	–	not used
4	700 (WH/VT)	Liftgate ajar switch
5	–	not used
6	–	not used
7	761 (GY/RD)	Door ajar switch, right front
8	765 (YE/BK)	Door ajar switch, left front
9	627 (BK/OG)	Door ajar indicator, control
10	158 (BK/PK)	Key warning switch, input
11	14 (BN)	Power, Exterior lamps
	1032 (WH/BK)	Trailer tow relay, feed
12	871 (YE)	Safety belt indicator, control
13	680 (LB/OG)	Wiper/washer, delay input
14	570 (BK/WH)	Ground
15	671 (LB)	Wiper run/park relay, switched output
16	–	not used
17	–	not used
18	647 (GY/LB)	Wiper high/low relay, control
19	646 (YE/WH)	Wiper run/park relay, control
20	1083 (LB/BK)	Air bag, tone driver
21	1302 (WH/LG)	Multifunction switch, Signal return
22	684 (PK/YE)	Wiper/washer, input
23	85 (BN/LB)	Safety belt buckle switch, input
24	686 (TN/RD)	Washer motor relay, control
25	70 (LB/WH)	ISO Bus
26	570 (BK/WH)	Ground

C201b (GY)

14401

A112
Generic Electronic
Module (GEM)

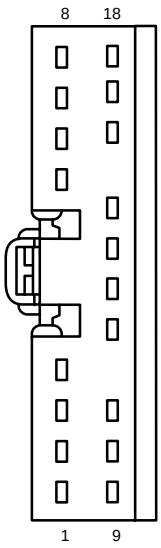

F18011

Pin	Circuit	Circuit Function
1	–	not used
2	996 (OG/WH)	Window motor, feed, Down
3	991 (TN/LB)	Master window adjust switch, feed, Down
4	–	not used
5	–	not used
6	1003 (GY/YE)	Voltage in Run (overload protected)
7	1007 (YE/RD)	Generic Electronic Module (GEM) to, One–touch window relay - output
8	1005 (VT/OG)	Generic Electronic Module (GEM) to, Battery saver relay - output
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
10	995 (GY)	Window motor, feed, Down
11	1001 (WH/YE)	Voltage supplied at all times (overload protected)
12	1008 (LG/OG)	Interior lamp relay, control
13	–	not used
14	1000 (RD/BK)	Voltage supplied in Start (overload protected)
15	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
16	1009 (OG/YE)	Rear window defrost relay, control
17	–	not used
18	57 (BK)	Ground