


**HEADLAMP/DRL RELAY**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 30 | 464 (BK/PK) | Low Beam Feed |
| 85 | 57 (BK) | Ground |
| 86 | 932 (GY/WH) | Power (Hot in Head) |
| 87 | 471 (OG/LG) | DRL Resistor Return |
| 87A | 13 (RD/BK) | Power (Hot in Head) |




**DRL ON/OFF RELAY**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 1 | 57 (BK) | Ground |
| 2 | 15 (RD/YE) | Power (Hot in Head) |
| 3 | 326 (WH/VT) | Power (Hot in Run) |
| 4 | 932 (GY/WH) | Headlamp DRL Relay Feed |
| 5 | – | NOT USED |

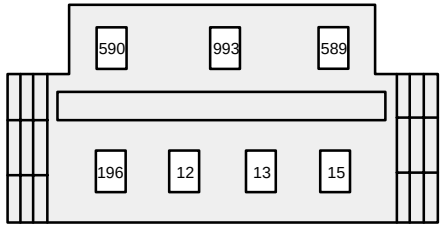


**C230a**

**MULTIFUNCTION SWITCH**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 12 | 632 (GY/OG) | High Beams |
| 13 | 13 (RD/BK) | Low Beams |
| 15 | 15 (RD/YE) | Dimmer Switch Feed Headlamp |
| 196 | 196 (DB/OG) | Flash to Pass Feed |
| 589 | 589 (OG) | Windshield Wiper Control Module Ground |
| 590 | 590 (DB/WH) | Wiper Control Module to Windshield Wiper Switch |
| 993 | 993 (BN/WH) | Wiper Control Module to Windshield Wiper Switch |

**CONNECTOR REFERENCE LIST**

| CONNECTOR | SECTION-PAGE |
|---|---|
| C250c | 60-7 |
| C274a | 13-12 |