## C122

### 12A581

M87
Speed control servo
(9C735)

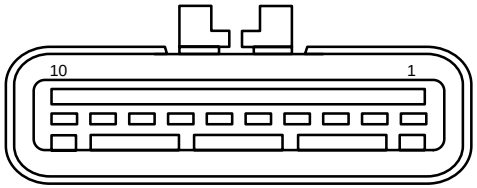


F10113

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | – | not used |
| 2 | – | not used |
| 3 | 679 (GY/BK) | Vehicle Speed Sensor (VSS) + |
| 4 | 511 (LG) | Brake pedal position switch (13480), to stoplamps |
| 5 | 151 (LB/BK) | Speed control switch, input |
| 6 | 848 (DG/OG) | Speed control switch, Ground |
| 7 | 298 (VT/OG) | Voltage in Run (overload protected) |
| 8 | – | not used |
| 9 | 810 (RD/LG) | Brake pedal position switch (13480), input |
| 10 | 676 (PK/OG) | Vehicle Speed Sensor (VSS) – |

## C123

### 12B637/9D930

Y134
EVAP canister
purge valve




F02105

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 361 (RD) | Voltage supplied in Start and Run (overload protected) |
| 2 | 191 (LG/BK) | Powertrain Control Module (PCM) (12A650), EVAP canister purge valve |

## C124

### 12A581

N1
Brake fluid level
switch (2L414)




F03093

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 57 (BK) | Ground |
| 2 | 512 (TN/LG) | Brake indicator, control |
| 3 | 531 (DG/YE) | Brake fluid level switch (2L414), signal |

## C125

### 12A581

M111
Windshield wiper
motor (17508)




F05092

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 58 (WH) | Wiper high/low relay, switched power, output, Low |
| 2 | 56 (DB/OG) | Wiper high/low relay, switched power, output, High |
| 3 | 61 (YE/RD) | Wiper motor relay, high/low, input |
| 4 | 65 (DG) | Wiper park relay, switched power, input |
| 5 | 28 (BK/PK) | Wiper run/park relay, switched power |