C908 (WH)

14335

Map reading lamp, left front (13466)



F03299

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	53 (BK/LB)	Interior lamp relay, switched power, output
3	705 (LG/OG)	Battery saver relay, output

C909 (BK)

***14335/**17C712**

Electronic Compass (19A548)

* Early production
** Late production



F04145

Pin	Circuit	Circuit function
1	702 (WH/BK)	Compass data +
2	703 (WH/OG)	Compass data –
3	1003 (GY/YE)	Voltage supplied in Start and Run (overload protected)
4	875 (BK/LB)	Ground

C911 (BK)

14335

Electrochromatic inside mirror unit (17700)

* Early production
** Late production

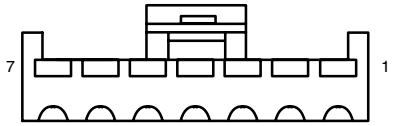

F07079

Pin	Circuit	Circuit function
1	294 (WH/LB)	Voltage supplied in Start and Run (overload protected)
2	*57 (BK)	Ground
	**875 (BK/LB)	Ground
3	*1789 (VT/WH)	switched power, Voltage supplied in reverse
	**140 (BK/PK)	Voltage supplied in reverse
4	–	not used
5	–	not used
6	–	not used
7	–	not used