C121 (BK)

12B637

Power steering pressure switch



F02203

Pin	Circuit	Circuit function
1	330 (YE/LG)	Power steering pressure switch, input
2	359 (GY/RD)	signal, return

C122 (BK)

14290

Speed control servo (9C735)

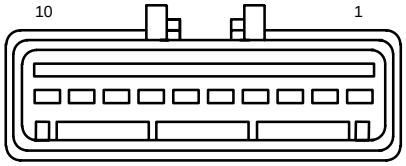

F10011

Pin	Circuit	Circuit function
1	914 (TN/OG)	SCP Bus +
2	915 (PK/LB)	SCP Bus –
3	–	not used
4	–	not used
5	151 (LB/BK)	Speed control switch, input
6	848 (DG/OG)	Speed control switch, return
7	1040 (RD/BK)	Voltage in Run (overload protected)
8	–	not used
9	535 (LB/RD)	Brake pressure switch (2B264), output
10	1205 (BK)	Ground

C123 (BK)

12B637

EVAP canister purge valve



F02105

Pin	Circuit	Circuit function
1	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
2	191 (LG/BK)	Powertrain Control Module (PCM) (12A650), EVAP canister purge valve

C124 (BK)

14290

Brake fluid level switch (2L414)

without IVD



F03093

Pin	Circuit	Circuit function
1	1305 (DB)	Brake fluid level switch (2L414), to, Front Electronic Module (FEM) (13C788)
2	–	not used
3	1205 (BK)	Ground

(BK)

with IVD



F02069

Pin	Circuit	Circuit function
1	1305 (DB)	Brake fluid level switch (2L414), to, Front Electronic Module (FEM) (13C788)
2	1205 (BK)	Ground