C202c (GY)

14401

Multifunction switch



F10091

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	13 (RD/BK)	Power, Hot with Low Beams on
7	13 (RD/BK)	Power, Hot with Headlamps on
8	196 (DB/OG)	Voltage supplied at all times (overload protected)
9	697 (BN)	High beam relay to Multifunction switch
10	–	not used

C205a (GY)

14401

Main light switch (11654)

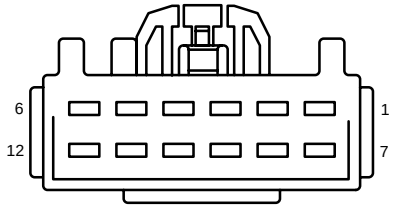

F12107

Pin	Circuit	Circuit function
1	–	not used
2	14 (BN)	Main light switch (11654), switched power, Hot in Park or Head
3	–	not used
4	–	not used
5	477 (LB/BK)	Fog lamp switch, to front fog lamp, Relay
6	1205 (BK)	Ground
7	1399 (DB/WH)	Autolamp On/Off signal
8	196 (DB/OG)	Voltage supplied at all times (overload protected)
9	13 (RD/BK)	Power, Hot with Headlamps on
10	195 (TN/WH)	Voltage supplied at all times (overload protected)
11	–	not used
12	14 (BN)	Power, Exterior lamps