PICKUP

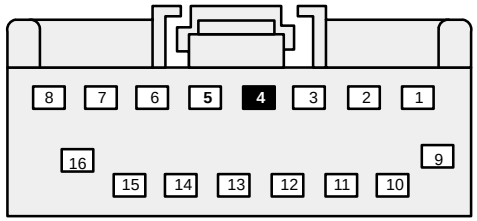

C257a

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19 (LB/RD)	Instrument Panel Lamp Feed
2	57 (BK)	Ground
3	1000 (RD/BK)	Power (Hot in Start)
4	–	NOT USED
5	802 (OG/RD)	Right Rear Speaker Feed (+)
6	803 (BN/PK)	Right Rear Speaker Return (–)
7	805 (WH/LG)	Right Front Speaker Feed (+)
8	811 (DG/OG)	Right Front Speaker Return (–)
9	797 (LG/VT)	Radio Memory Power
10	1002 (BK/VT)	Ignition Power (Hot in Acc or Run)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Left Rear Speaker Feed (+)
13	801 (TN/YE)	Left Rear Speaker Return (–)
14	804 (OG/LG)	Left Front Speaker Feed (+)
15	813 (LB/WH)	Left Front Speaker Return (–)
16	694 (BK/LG)	Ground

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C242a C242b	13-39, 13-41 13-40, 13-42