C1017b

12A581

K22
Starter relay (11450)



F01014

Pin	Circuit	Circuit function
1	1093 (TN/RD)	Power, Hot in Start with Park or Neutral

C1017c

14B060

K22
Starter relay (11450)



F01014

Pin	Circuit	Circuit function
1	1118 (RD)	feed to Starter motor (11002)

C1018

12A581

V34
PCM power diode



F02009

Pin	Circuit	Circuit function
1	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)

C1019 (GY)

14401

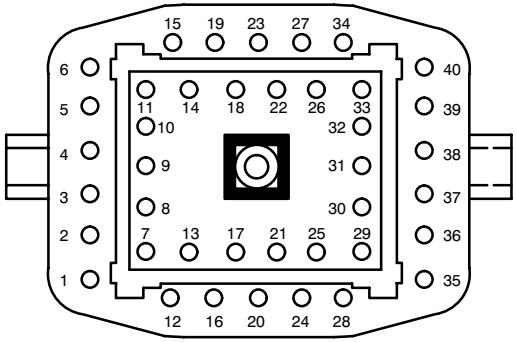

F40003

12A581

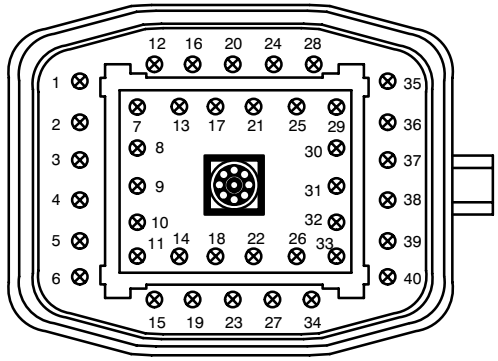

F40002

(1)		(11)	294 (WH/LB)	(21)	420 (DB/YE)	(31)	429 (VT/LG)
(2)		(12)		(22)	470 (PK/BK)	(32)	428 (OG/BK)
(3)		(13)		(23)		(33)	
(4)	1543 (YE)	(14)	729 (RD/WH)	(24)	460 (YE/LB)	(34)	275 (YE)
(5)	1462 (RD/WH)	(15)	939 (VT)	(25)	161 (DG/OG)	(35)	
(6)	43 (DB)	(16)		(26)	432 (PK/BK)	(36)	787 (PK/BK)
(7)	421 (PK)	(17)	1115 (TN/WH)	(27)	603 (DG)	(37)	
(8)	6 (YE/LG)	(18)	767 (LB/OG)	(28)		(38)	
(9)	29 (YE/WH)	(19)	533 (TN/RD)	(29)	70 (LB/WH)	(39)	
(10)	140 (BK/PK)	(20)	131 (VT/OG)	(30)	396 (BK/OG)	(40)	