C175b

7C078, A/T

A147
Powertrain Control
Module (PCM)

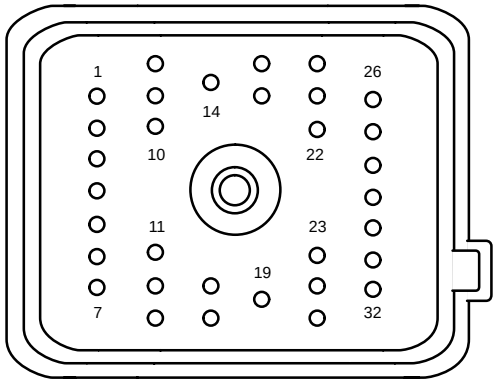

F32001

Pin	Circuit	Circuit Function
1	91S-TA23 (BN)	Ground, Switched
2	91S-TA24 (BN/RD)	Ground, Switched
3	91S-TA69 (BN/WH)	Ground, Switched
4	91S-TA70 (BN/YE)	Ground, Switched
5	91S-TA47 (BN/WH)	Ground, Switched
6	–	not used
7	91S-TA63 (BN/GN)	Ground, Switched
8	–	not used
9	8-TA37 (WH)	Sensor signal
10	8-TA38 (WH/RD)	Sensor signal
11	–	not used
12	91S-TA65 (BN/WH)	Ground, Switched
13	91S-TA64 (BN/YE)	Ground, Switched
14	–	not used
15	91S-RJ25 (BN/BU)	Ground, Switched
16	91S-RJ26 (BN/GN)	Ground, Switched

Pin	Circuit	Circuit Function
17	9-TA1 (BN)	Sensor signal return (reference/ ground)
18	8-TA39 (WH/BU)	Sensor signal
19	–	not used
20	–	not used
21	8-TA74 (WH/BK)	Sensor signal
22	8-TA40 (WH/GN)	Sensor signal
23	8-TA26 (WH/RD)	Sensor signal
24	–	not used
25	–	not used
26	8-TA51 (WH/RD)	Sensor signal
27	8-TA27 (WH/VT)	Sensor signal
28	8-RJ25 (WH/BU)	Sensor signal
29	8-RJ26 (WH/GN)	Sensor signal
30	8-TA71 (WH/BU)	Sensor signal
31	–	not used
32	–	not used

C175b

7E443, M/T

A147
Powertrain Control
Module (PCM)

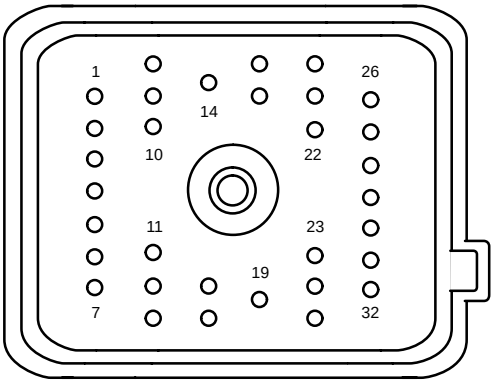

F32001

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	8-TA54 (WH/VT)	Sensor signal
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	91S-RJ25 (BN/BU)	Ground, Switched
16	91S-RJ26 (BN/GN)	Ground, Switched
17	9-TA1 (BN)	Sensor signal return (reference/ ground)

Pin	Circuit	Circuit Function
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	8-TC18 (WH)	Sensor signal
23	–	not used
24	–	not used
25	–	not used
26	8-TA57 (WH/RD)	Sensor signal
27	–	not used
28	8-RJ25 (WH/BU)	Sensor signal
29	8-RJ26 (WH/GN)	Sensor signal
30	–	not used
31	–	not used
32	–	not used