C220b

14401

Instrument cluster

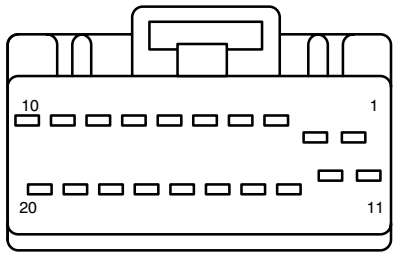

F22003

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	29-GG11 (OG/BU)	Voltage supplied at all times (overload protected)
4	8-GL36 (WH/RD)	TX, signal
5	10-GL36 (GY/RD)	RX, signal
6	15-GG14 (GN/RD)	Voltage supplied in Start and Run (overload protected)
7	–	not used
8	8-TA34 (WH)	Park, switch sense
9	9-LG43 (BN/WH)	Multifunction switch, Signal return
10	10-GJ9 (GY/OG)	Horn switch, switch sense

F20012

Pin	Circuit	Circuit function
11	–	not used
12	–	not used
13	91-GG11 (BK/BU)	Ground
14	–	not used
15	4-EG8 (GY/VT)	Standard Corporate Protocol (SCP) data +
16	5-EG8 (BU/WH)	Standard Corporate Protocol (SCP) data –
17	75-GG15 (YE/GN)	Voltage in Run or Accessory (overload protected)
18	31S-BB12 (BK/YE)	Starter relay (11450), control
19	8-LE14 (WH/BU)	High beam, switch sense, signal
20	8-LG43 (WH/VT)	Turn lamps, switch sense, signal