SUPERCREWZER

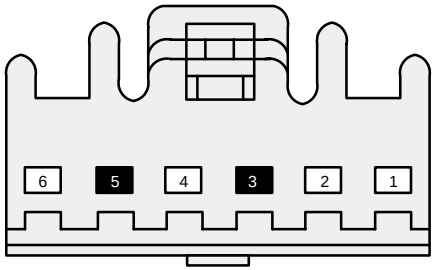

C242
MAIN LIGHT SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19 (LB/RD)	Switch Illumination Circuit
2	402 (OG/LG)	Interior Lamp Switch
3	–	NOT USED
4	57 (BK)	Ground
5	–	NOT USED
6	14 (BN)	Power (Hot in Park or Run)

SUPERCREWZER

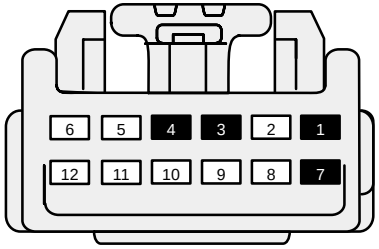

C246
MAIN LIGHT SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	188 (WH/BK)	Power (Hot in Park or Head)
3	–	NOT USED
4	–	NOT USED
5	477 (LB/BK)	Fog Lamps
6	57 (BK)	Ground
7	–	NOT USED
8	196 (DB/OG)	Power (Hot at All TImes)
9	15 (RD/YE)	Headlamps Output
10	195 (TN/WH)	Power (Hot at All Times)
11	257 (WH/RD)	Lamps on Output to GEM
12	14 (BN)	Exterior Lamps Output