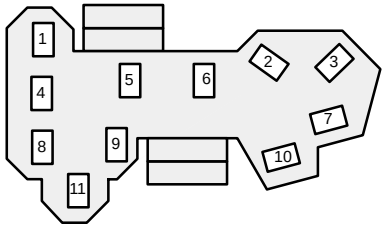

C268 (GRAY)

MULTIFUNCTION SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	298 (VT/OG)	Power (Hot in Run)
2	5 (OG/LB)	Right Park/Stop/Turn Lamps
3	379 (BN/WH)	Right Cornering Lamp
4	10 (LG/RD)	B+
5	2 (WH/LB)	Right Turn Indicator and Lamps
6	44 (LB)	Turn Signal Flasher Input
7	380 (VT/YE)	Left Cornering Lamp
8	3 (LG/WH)	Left Turn Indicator and Lamps
9	511 (LG)	Stoplamp Input
10	9 (LG/OG)	Left Park/Stop/Turn Lamps
11	385 (WH/RD)	Hazard Flasher Input



C2002 (BLACK)

BRAKE PEDAL POSITION (BPP) SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	10 (LG/RD)	Stoplamp Switch Feed
2	511 (LG)	Stoplamp (BPP) Switch to Stoplamps

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C162	42-3
C185	23-9
C234	31-3
C250	60-8
C251	60-8
C256	63-5
C2029	58-5