C392

14A005

N316
Inertia Fuel Shutoff
(IFS) switch
(9D362)



F03072

Pin	Circuit	Circuit Function
1	–	not used
2	361 (RD)	Voltage supplied in Start and Run (overload protected)
3	866 (WH)	Inertia Fuel Shutoff (IFS) switch (9D362), output

C401a

18W862

A432
Vehicle Emergency
Message System
(VEMS) module



F12103

Pin	Circuit	Circuit Function
1	1110 (LG/VT)	Voltage supplied at all times (overload protected)
2	716 (YE)	R–Data
3	712 (OG)	C–Data
4	711 (RD)	T–Data
5	915 (PK/LB)	SCP Bus –
6	694 (BK/LG)	Ground
7	1003 (GY/YE)	Voltage in Run (overload protected)
8		not used
9	708 (DG)	Transmit audio, in On/Off
10	709 (GY)	Receive audio unit
11	914 (TN/OG)	SCP Bus +
12	717 (TN)	Handset, audio ground

C401b

18W862

A432
Vehicle Emergency
Message System
(VEMS) module

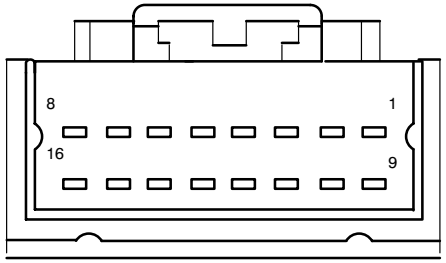

F16097

Pin	Circuit	Circuit Function
1	–	not used
2	714 (VT)	Microphone, audio
3	712 (OG)	C–Data
4	–	not used
5	713 (WH)	Microphone, Ground
6	1112 (WH/LB)	Restraints control module (14B321)
7	868 (GY/RD)	Vehicle Emergency Message System (VEMS) module
8	681 (TN/RD)	Vehicle Emergency Message System (VEMS) module
9	716 (YE)	R–Data
10	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
11	711 (RD)	T–Data
12	819 (LG/WH)	Shield
13	833 (TN)	Audio corporate protocol B
14	832 (LB/PK)	Audio corporate protocol A
15	721 (BN)	Vehicle Emergency Message System (VEMS) module
16	877 (WH/OG)	Vehicle Emergency Message System (VEMS) module