C270d (BK)

12A581

Central Junction
Box (CJB) (14A068)

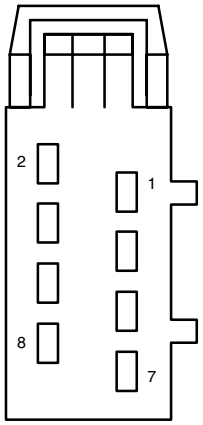

F08112

Pin	Circuit	Circuit function
1	33 (WH/PK)	Voltage supplied in Start (overload protected)
2	534 (YE/LG)	Voltage supplied at all times (overload protected)
3	113 (YE/LB)	Starter relay (11450), output
4	65 (DG)	Voltage supplied at all times (overload protected)
5	196 (DB/OG)	Voltage supplied at all times (overload protected)
6	–	not used
7	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
8	1523 (DG)	Voltage supplied at all times (overload protected)