C270d

14A005

Central Junction
Box (CJB) (14A068)

* without parking aid
** with parking aid

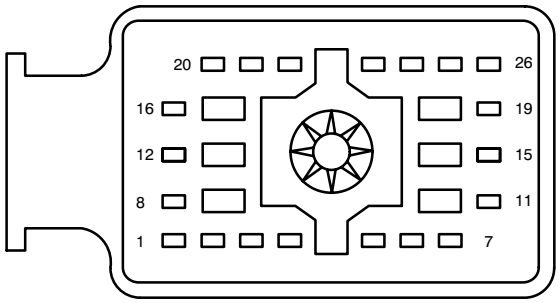

F26027

Pin	Circuit	Circuit function
1	20-DA5 (PK/OG)	Voltage in Run (overload protected)
2	29-CF58 (OG/GN)	Voltage supplied at all times (overload protected)
3	29S-DK22 (OG/YE)	fused feed, Switched System Power (SSP) 2
4	–	not used
5	–	not used
6	20-HC1 (PK/YE)	Voltage in Run (overload protected)
7	15-JA10 (GN/OG)	Voltage supplied in Start and Run (overload protected)
8	*20-DK20 (PK/OG)	Voltage in Run (overload protected)
	**20-DA1 (PK/YE)	Voltage in Run (overload protected)
9	30-DD2 (RD/BU)	SSP 2 relay, switched power, output
10	30-DD1 (RD/YE)	Voltage supplied at all times (overload protected)
11	–	not used
12	–	not used
13	29-HA6 (OG/YE)	Voltage supplied at all times (overload protected)

Pin	Circuit	Circuit function
14	–	not used
15	29-DA3 (OG)	Voltage supplied at all times (overload protected)
16	–	not used
17	30-DD3 (RD/OG)	SSP 2 relay, switched power, output
18	–	not used
19	–	not used
20	29S-LC36 (OG/YE)	fused feed, Switched System Power (SSP) 3
21	29S-LB2B (OG/BU)	fused feed, Switched System Power (SSP) 3
22	29S-LC5 (OG/BU)	fused feed, Switched System Power (SSP) 3
23	15-RP1 (GN/WH)	Voltage supplied in Start and Run (overload protected)
24	64S-AD2 (BU/RD)	Illumination, feed
25	64S-LH2 (BU/RD)	Illumination, feed
26	64S-LH33 (BU/BK)	Illumination, feed