Object Detection Metrics & Post-processing

IoU, NMS, and mAP

Goals

- Understand how detections match to ground truth via IoU
- Know how overlapping predictions are pruned with NMS
- Interpret precision, recall, AP, and mAP


Detector Outputs


- For each image returns: boxes (x1,y1,x2,y2), class scores, confidence/objectness
- Multiple detections may target the same object → need post-processing
- Evaluation → ties predictions to ground truth using IoU + class match ie. (IoU >threshold and correct class)

Intersection over Union (IoU)

Used during training


- Measures quality between predicted and ground-truth boxes
- Range [0,1]; higher is better
- Used for matching: TP if class is correct AND IoU ≥ threshold (e.g., 0.5)

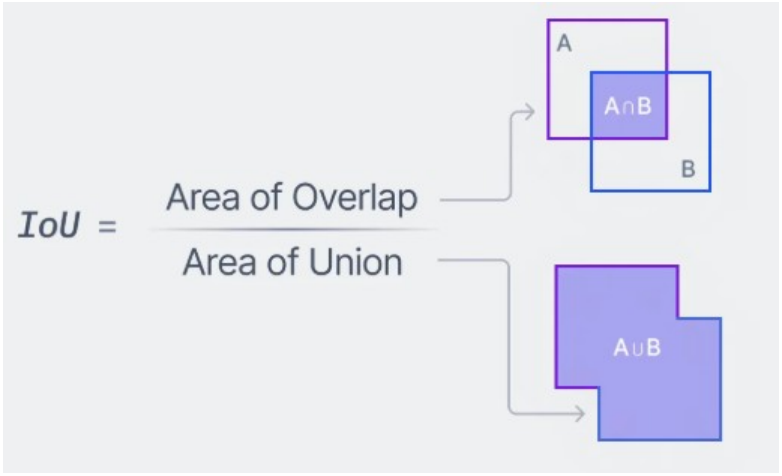

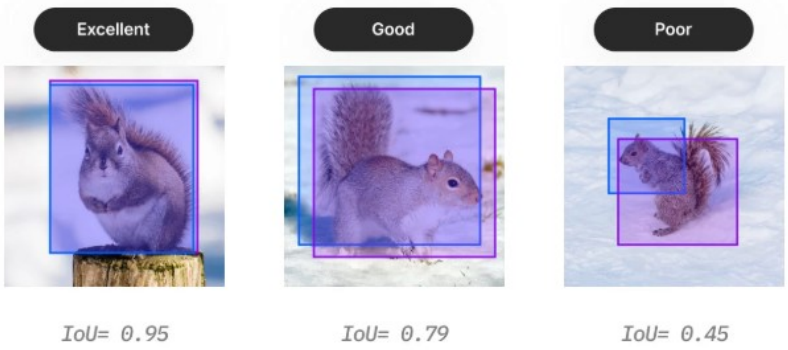

See v7labs tutorial

IoU example

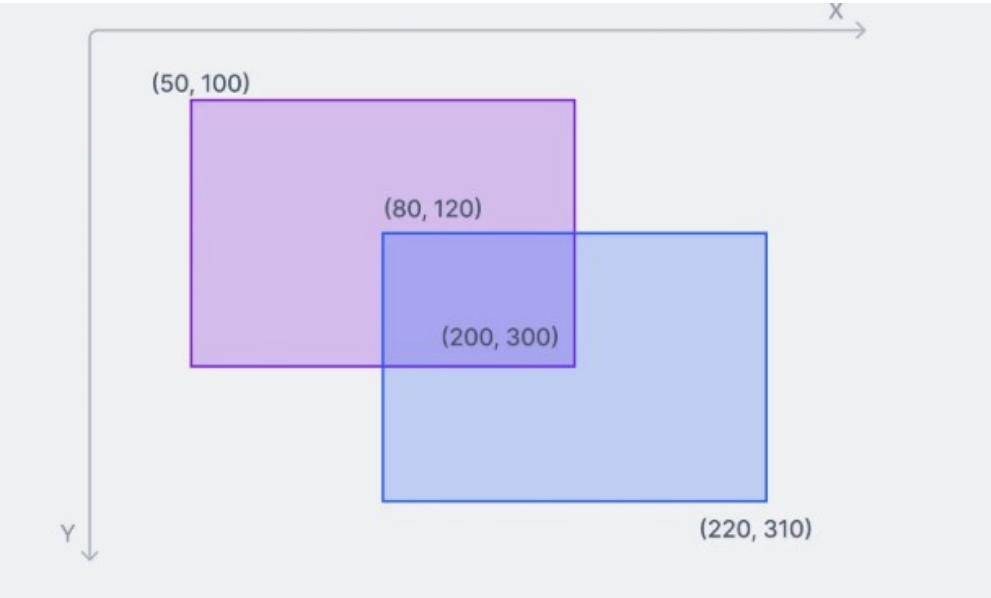

Intersection=(200 – 80) x (300 - 120) = 21,600
Purple= (200 - 50) x (300 - 100) = 30,000
Blue= (220 – 80) x (310 – 120) = 26,600

I0U = 21,600/56,600 = 0.38

v7labs tutorial

Non-Max Suppression (NMS)


- Why: detectors output many overlapping boxes per object
- It's easy for us to see individual objects, computers just see IOU scores
- Need a way to drop boxes identifying same object using just IOU scores
- Solution->NMS: sort boxes by score, keep best, drop overlaps above IoU threshold

NMS example




For this Image

NMS example

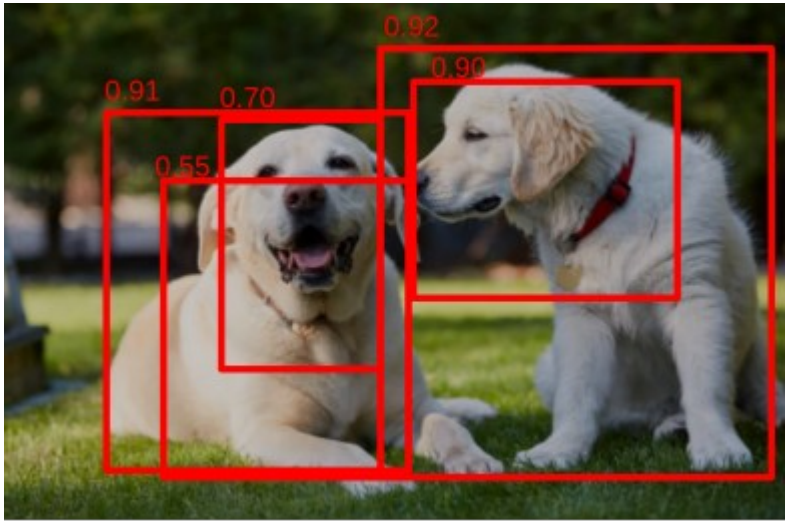

Object detector proposed these bounding boxes and confidences.

NMS example

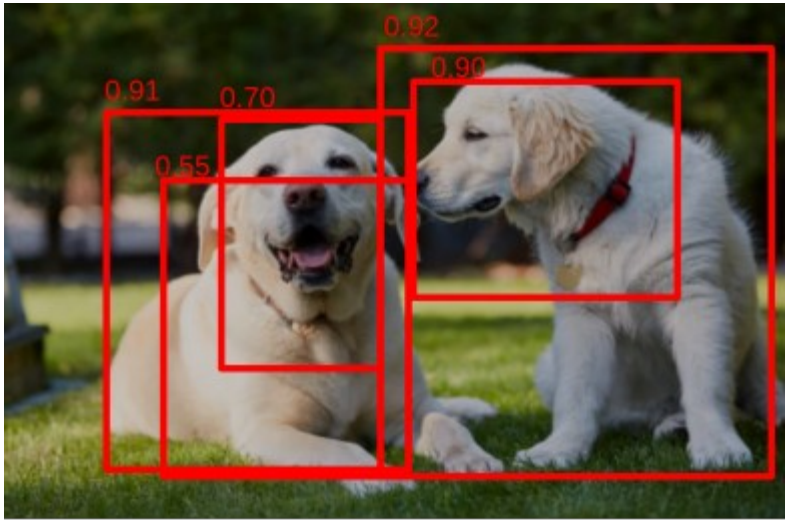

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
1	.91	
2	.70	
3	.55	
4	.92	
5	.90	

Keepers

Box #	Score

NMS example

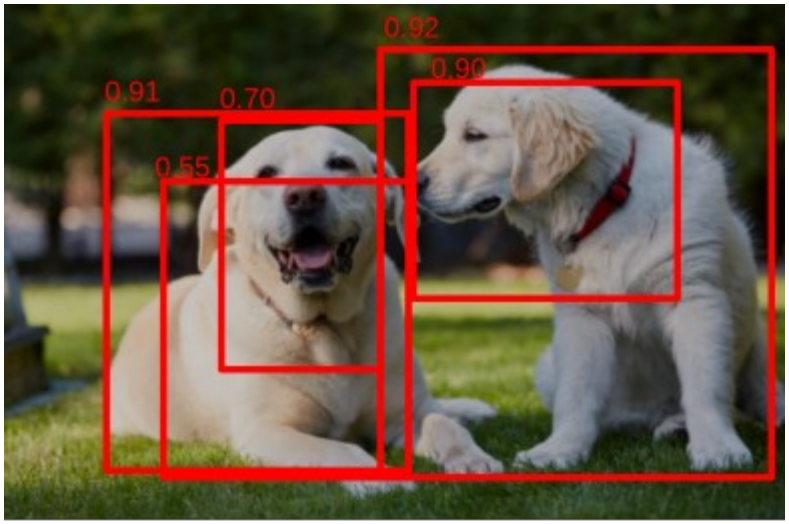

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
1	.91	
2	.70	
3	.55	
5	.90	

Keepers

Box #	Score
4	.92

NMS example

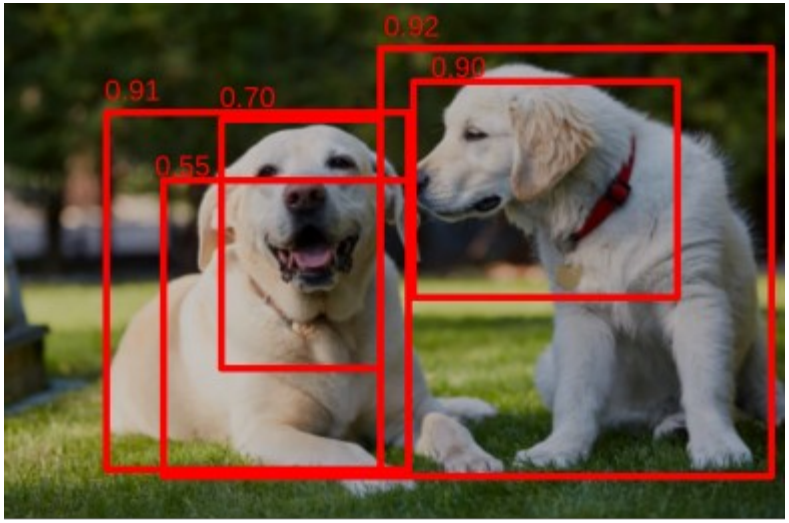

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
1	.91	0.1
2	.70	0
3	.55	0.07
5	.90	0.3

Keepers

Box #	Score
4	.92

NMS example

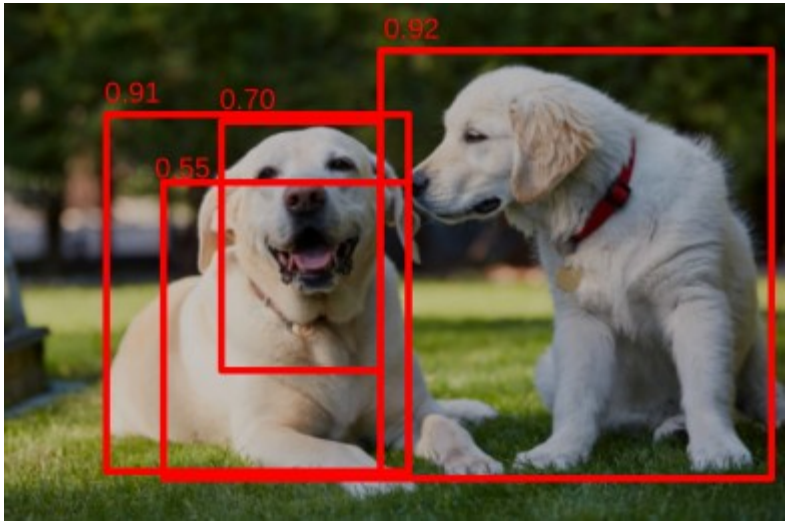

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
1	.91	0.1
2	.70	0
3	.55	0.07

Keepers

Box #	Score
4	.92

NMS example

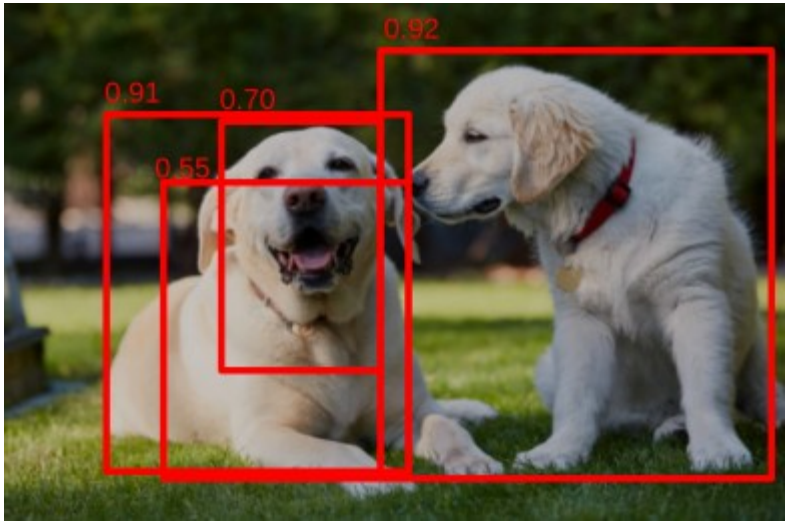

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
2	.70	
3	.55	

Keepers

Box #	Score
4	.92
1	.91

NMS example

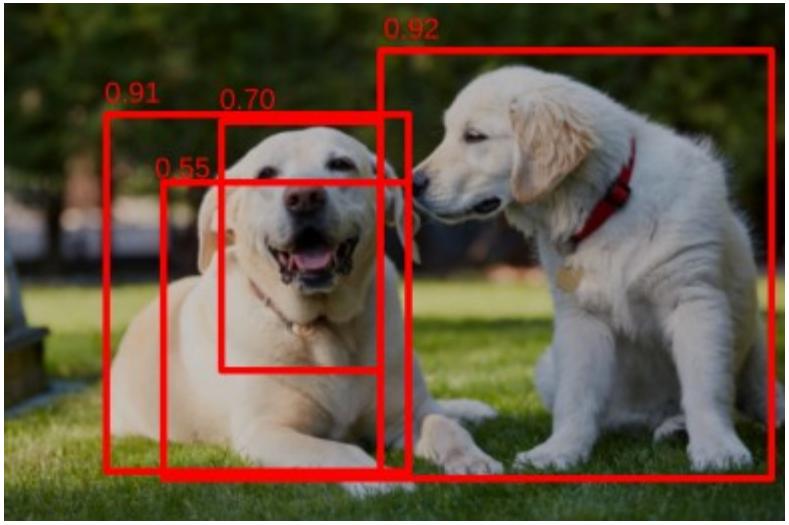

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)


Proposals

Box #	Score	IoU
2	.70	.3
3	.55	.7

Keepers

Box #	Score
4	.92
1	.91

NMS example

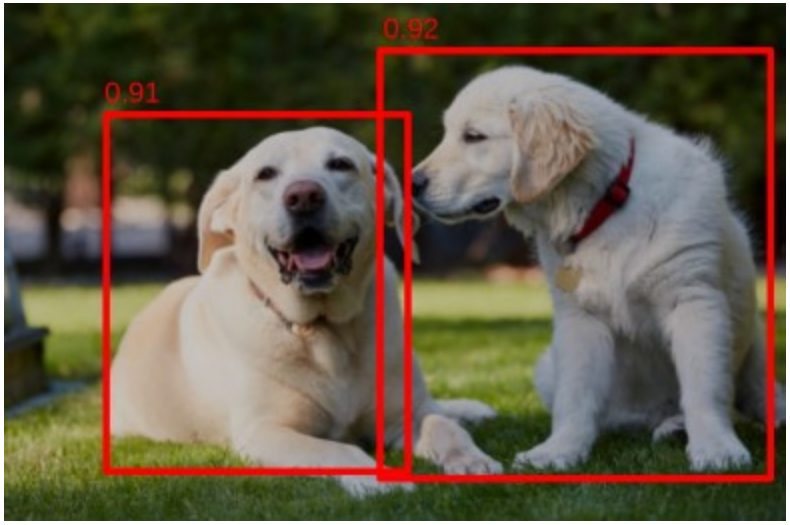

Algorithm

- Save highest confidence box
- Compute IoU with all other boxes
- Delete bounding boxes with IoU >threshold (say 0.2)

Proposals

Box #	Score	IoU

Keepers

Box #	Score
4	.92
1	.91

Precision, Recall

- Precision = TP/(TP+FP) → of what you predicted, how much was correct?
- Recall = TP/(TP+FN) → of what exists, how much did you find?

Average Precision (AP)


- Measures how good a detector is for **one class** by summarizing its whole precision–recall trade-off into a single number. Fix an IoU threshold (e.g., 0.5), sweep the score/confidence threshold from high→low, plot precision vs. recall, and take the area under that curve. Bigger area ⇒ better detector for that class.

Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

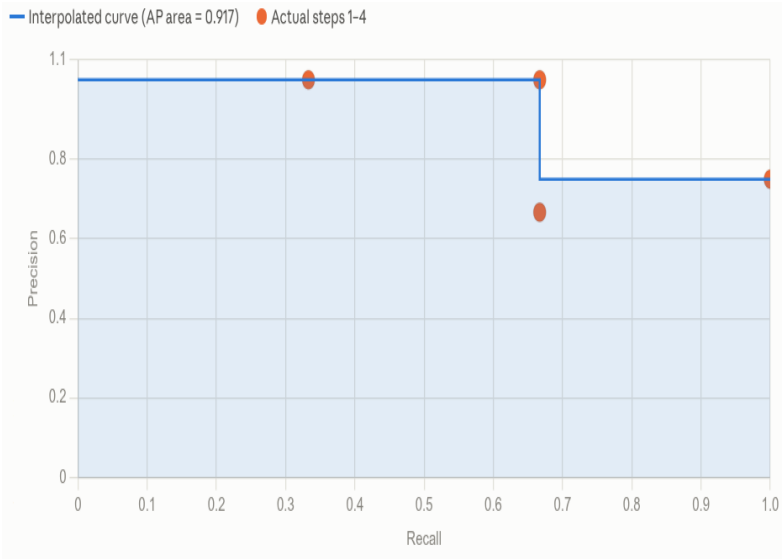


Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

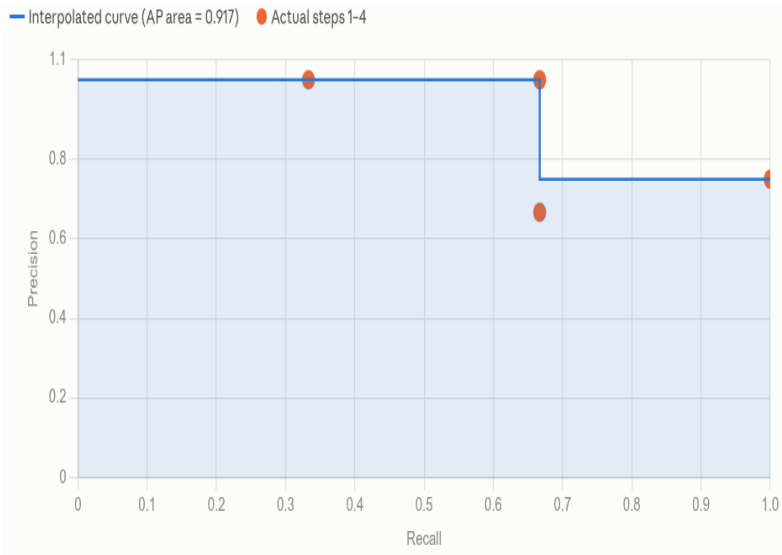

AP=> take the area under the curve of plot (max of P*R=1x1=1).

1*.67 + .75*.33 ~.92


That means for this class you have an AP@0.5 = .92

Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

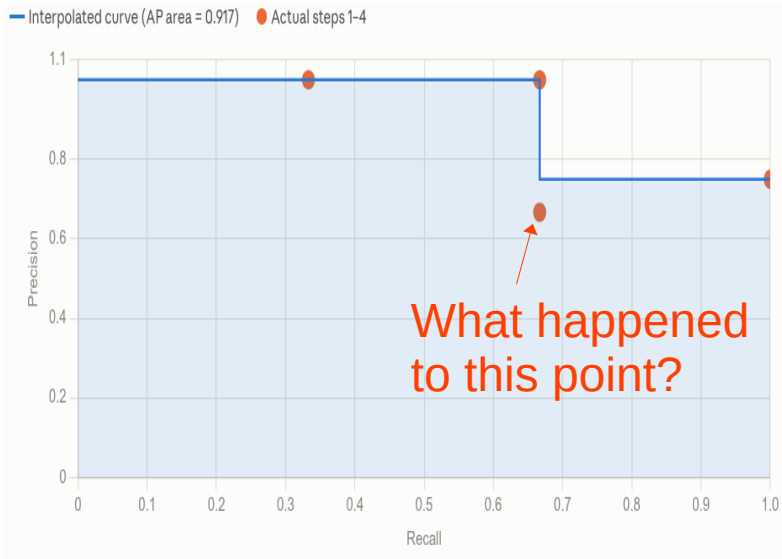


Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

Cant have a diagonal line (no intermediate points)

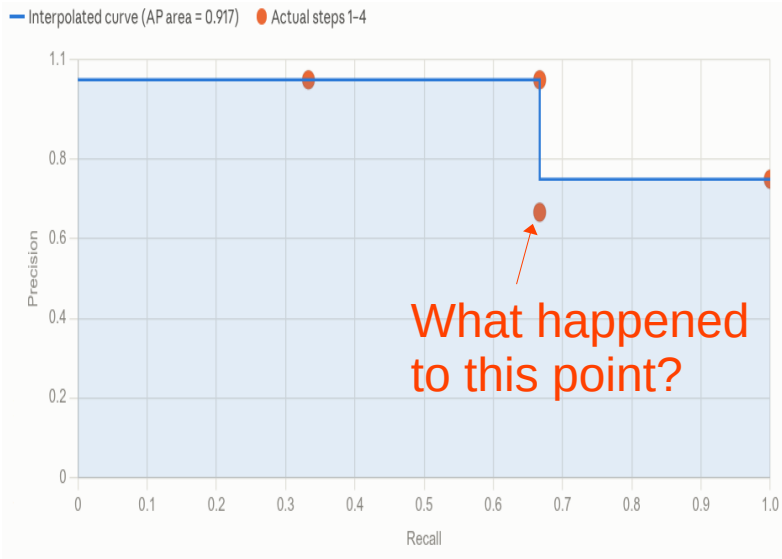


Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

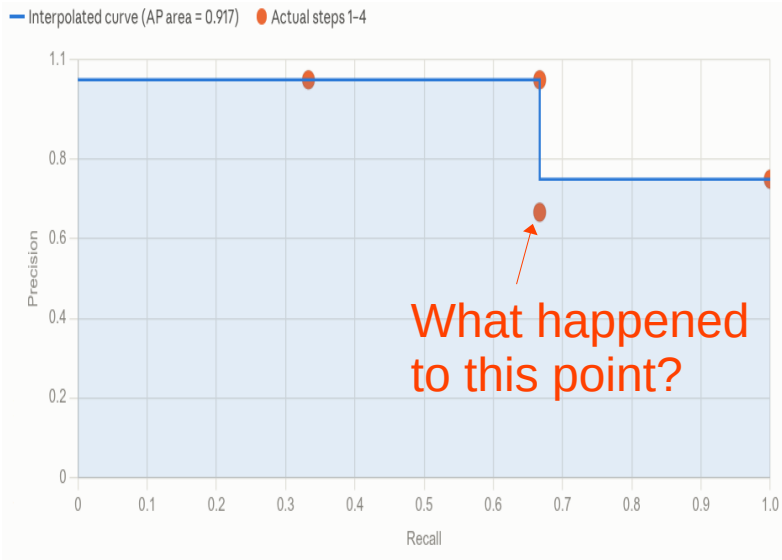

Cant have a diagonal line (no intermediate points)


Use Interpolated Precision. At each recall level, take the highest precision at that recall or any higher recall,

Average Precision (AP)

$$P = \frac{T_p}{T_p + F_p} \qquad R = \frac{T_p}{T_p + F_n}$$

- Ex. Suppose Class A has **3 ground-truth objects**. And you are using an IoU threshold of .5. As you lower the model score threshold (confidence) you accumulate predictions:

step	TP	FP	Precision	Recall	confidence
1	1	0	1.00	0.33	.9
2	2	0	1.00	0.67	.8
3	2	1	0.67	0.67	.7
4	3	1	0.75	1.00	.6

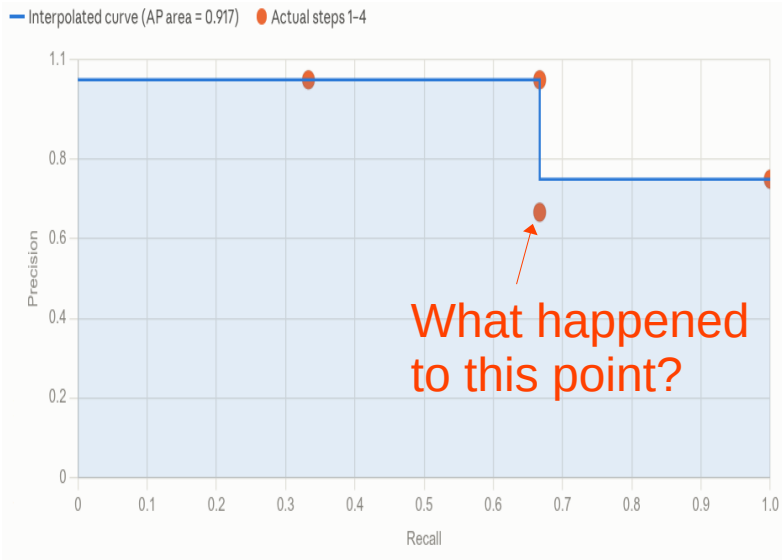

Cant have a diagonal line (no intermediate points)

Use Interpolated Precision. At each recall level, take the highest precision at that recall or any higher recall,

Or.. **sweep right to left, carrying the running max of precision.**

mAP

mAP stands for **Mean Average Precision** and is the most common metric used to evaluate the performance of object detection models in computer vision.

An average of AP's for all classes the model detects.

It provides a single number that summarizes a model's performance across all object classes and at different levels of detection quality.

A high mAP score indicates the model is good at two things:

1. **Correctly identifying** the object's class (High **Precision**).
2. **Accurately locating** the object in the image (High **Recall** and accurate bounding box).

mAP

Ex. Two classes – calculate mAP@0.5

Class A AP@0.5 = 0.83

Class B (different predictions/ground truths) AP@0.5 = 0.60

Then mAP@0.5 across these two classes is the mean:

$$\text{mAP@0.5} = \frac{0.83 + 0.60}{2} = 0.715$$