## C250 (GY)

**14401**

N278
Ignition switch
(11572)

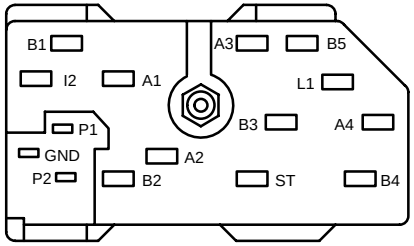


F15014

| Pin | Circuit | Circuit Function |
|---|---|---|
| I2 | – | not used |
| B1 | 38 (BK/OG) | Voltage supplied at all times (overload protected) |
| A1 | 297 (BK/LG) | Voltage in Run or Accessory (overload protected) |
| P1 | 162 (LG/RD) | Parking brake switch (15A851) |
| GND | 57 (BK) | Ground |
| P2 | – | not used |
| B2 | – | not used |
| A2 | – | not used |
| ST | 32 (RD/LB) | Voltage supplied in Start (overload protected) |
| B3 | 38 (BK/OG) | Voltage supplied at all times (overload protected) |
| A3 | 687 (GY/YE) | Voltage in Run (overload protected) |
| B5 | 38 (BK/OG) | Voltage supplied at all times (overload protected) |
| I1 | 262 (BN/PK) | Voltage supplied in Start and Run (overload protected) |
| A4 | 687 (GY/YE) | Voltage in Run (overload protected) |
| B4 | 38 (BK/OG) | Voltage supplied at all times (overload protected) |