-1

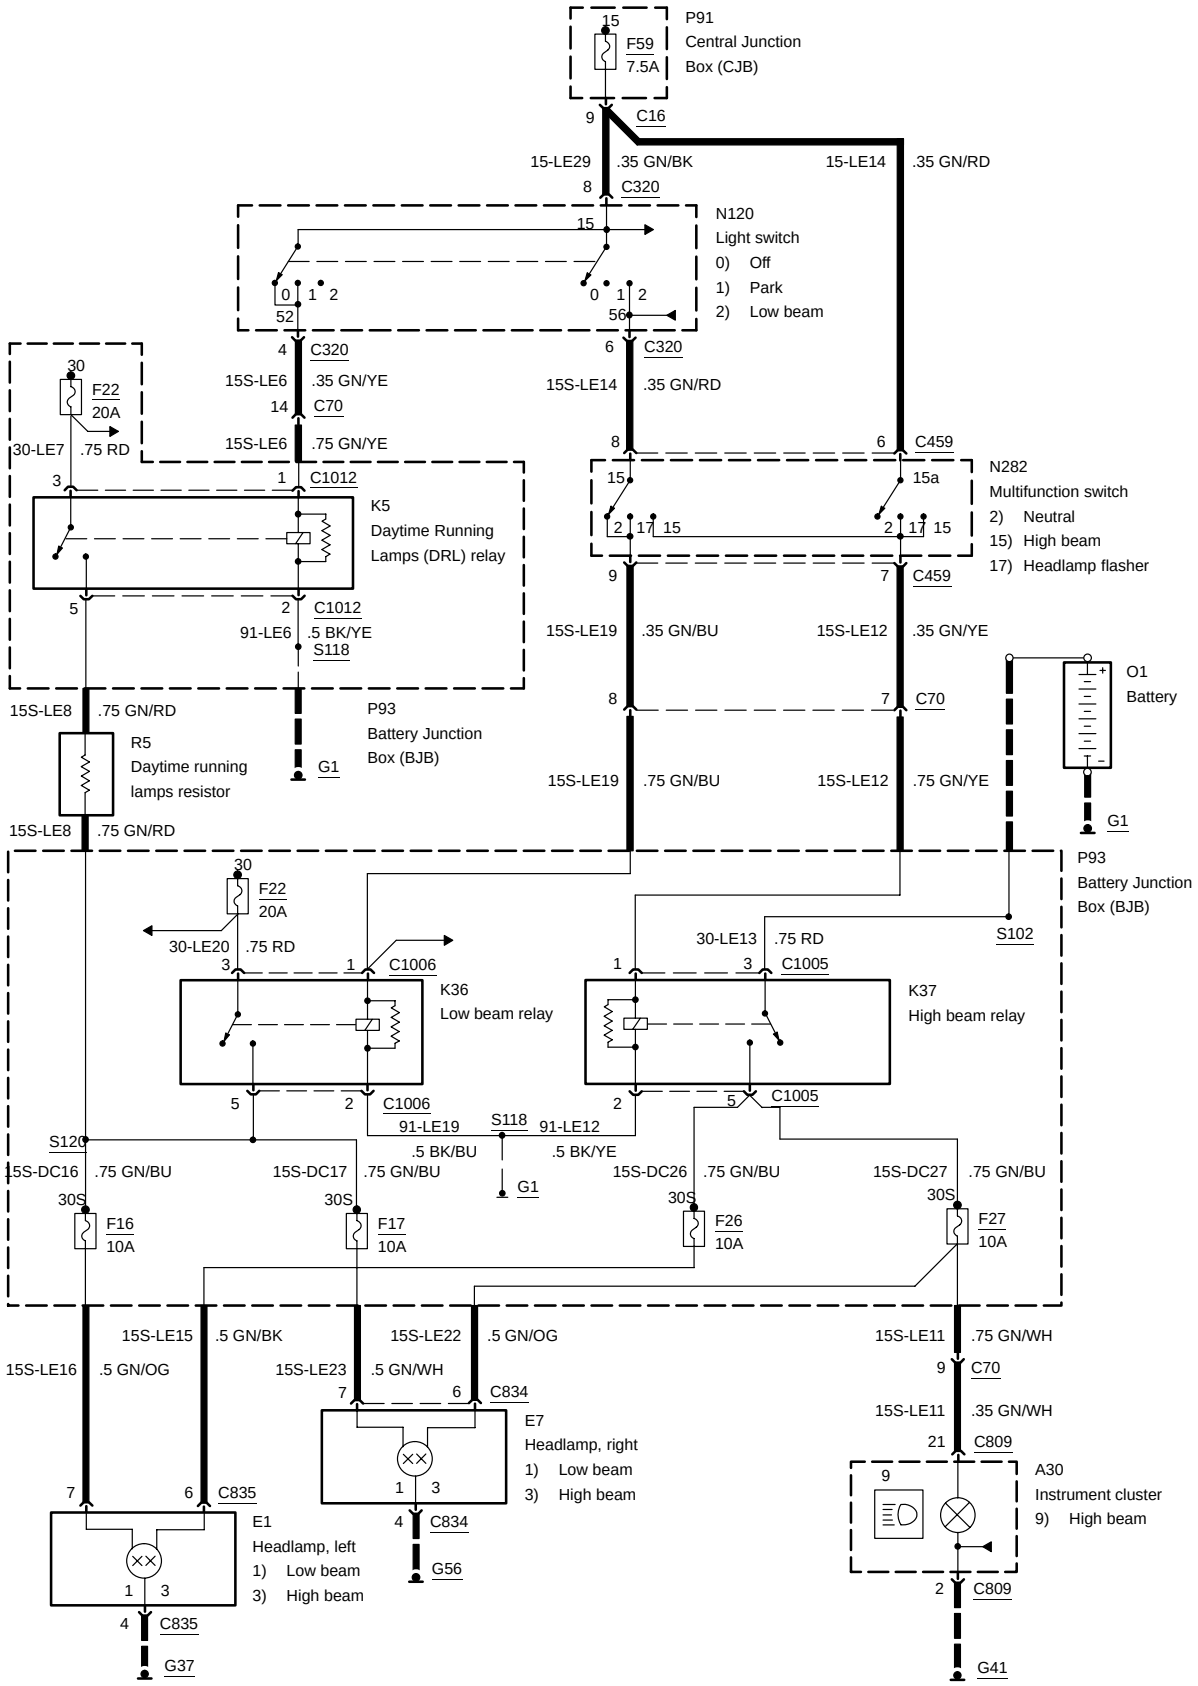
P91
Central Junction
Box (CJB)
F59
7.5A
C16
15-LE29 .35 GN/BK
15-LE14 .35 GN/RD
C320
N120
Light switch
0) Off
1) Park
2) Low beam
52
56
C320
15S-LE6 .35 GN/YE
C70
15S-LE6 .75 GN/YE
15S-LE14 .35 GN/RD
C459
N282
Multifunction switch
2) Neutral
15) High beam
17) Headlamp flasher
F22
20A
30-LE7 .75 RD
C1012
K5
Daytime Running
Lamps (DRL) relay
91-LE6 .5 BK/YE
S118
15S-LE19 .35 GN/BU
15S-LE12 .35 GN/YE
15S-LE8 .75 GN/RD
R5
Daytime running
lamps resistor
P93
Battery Junction
Box (BJB)
G1
15S-LE19 .75 GN/BU
15S-LE12 .75 GN/YE
O1
Battery
30-LE20 .75 RD
C1006
K36
Low beam relay
30-LE13 .75 RD
S102
C1005
K37
High beam relay
S120
91-LE19 .5 BK/BU
91-LE12 .5 BK/YE
15S-DC16 .75 GN/BU
15S-DC17 .75 GN/BU
15S-DC26 .75 GN/BU
15S-DC27 .75 GN/BU
F16
10A
F17
10A
F26
10A
F27
10A
15S-LE15 .5 GN/BK
15S-LE16 .5 GN/OG
15S-LE22 .5 GN/OG
15S-LE23 .5 GN/WH
C834
E7
Headlamp, right
1) Low beam
3) High beam
15S-LE11 .75 GN/WH
15S-LE11 .35 GN/WH
C809
A30
Instrument cluster
9) High beam
C835
E1
Headlamp, left
1) Low beam
3) High beam
G56
G37
G41