C201a

14290

A213
Front Electronic
Module (FEM)

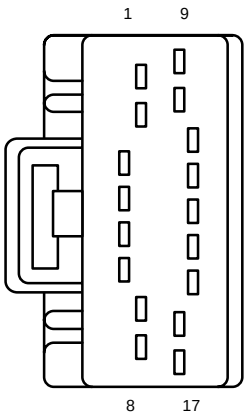

F17007

Pin	Circuit	Circuit Function
1	29S-DK21 (OG/WH)	Voltage supplied at all times (overload protected), Switched
2	9-CE9 (BN/GN)	Sensor signal return (reference/ ground)
3	–	not used
4	31S-LG18 (BK/YE)	Ground, Switched
5	31S-LG11 (BK/WH)	Ground, Switched
6	31-GL58 (BK/GN)	Ground
7	31S-LE23 (BK/WH)	Ground, Switched
8	31S-LE16 (BK/RD)	Ground, Switched
9	8-CE9 (WH/GN)	Sensor signal
10	31S-LE22 (BK/RD)	Ground, Switched
11	31-DK20A (BK/RD)	Ground
12	–	not used
13	31-DK20B (BK/RD)	Ground
14	31-DK20C (BK/RD)	Ground
15	31-DK20D (BK/RD)	Ground
16	–	not used
17	31S-LE15 (BK/GN)	Ground, Switched

C201b

14290

A213
Front Electronic
Module (FEM)

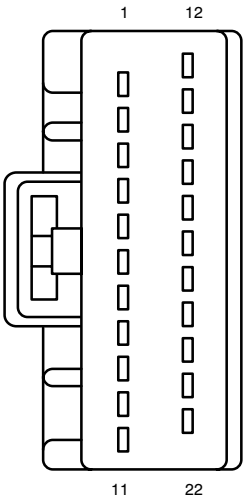

F22003

Pin	Circuit	Circuit Function
1	91S-KA39 (BN/YE)	Ground, Switched
2	–	not used
3	91S-KA16 (BN/GN)	Ground, Switched
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	31S-LF17 (BK/WH)	Ground, Switched
12	–	not used
13	31S-KA8 (BK/BU)	Ground, Switched
14	31S-KA7 (BK/WH)	Ground, Switched
15	8-GC8 (WH/BU)	Sensor signal
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	31S-DK21 (BK/WH)	Ground, Switched
22	31S-LF8 (BK/OG)	Ground, Switched