Master window adjust switch

Schematic

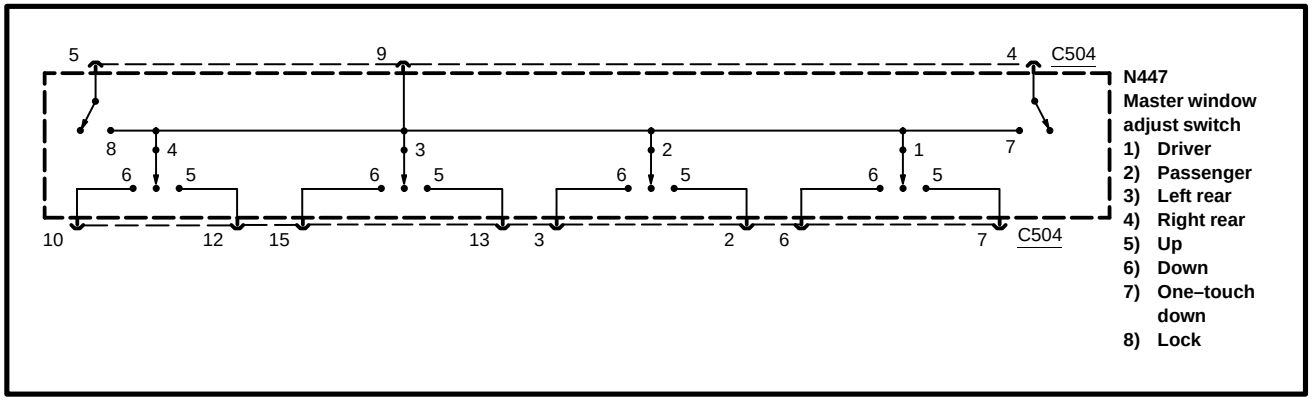

Terminals

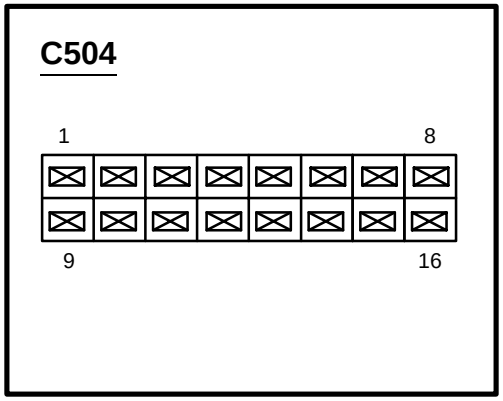

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Switch lock	5 and 9	Lock On	Closed circuit
		Lock Off	Open circuit
One–Touch Down Switch	4 and 9	Down	Closed circuit
		Neutral	Open circuit
Left front window cir-cuit	7 and 9	Up	Closed circuit
	6 and 9	Down	Closed circuit
Right front window cir-cuit	2 and 9	Up	Closed circuit
	3 and 9	Down	Closed circuit
Left rear window cir-cuit	9 and 13	Up	Closed circuit
	9 and 15	Down	Closed circuit
Right rear window cir-cuit	9 and 12	Up	Closed circuit
	9 and 10	Down	Closed circuit